

# METFRAME SPECIFICATION GUIDE

Metsec's Offsite Panelised System

# TRUST

MetWALL Perform, our 30 year wall performance warranty



Free CPD seminars



£5m professional indemnity insurance as standard



UKAS accredited testing



Collateral design warranty



Site inspections



Colour coding for value engineering



Approved installer list



Load bearing system suitable up to 15 storeys



Multiple choice of plasterboard and sheathing board with test data




Free CAD/Revit design on infill jobs over 1000m<sup>2</sup>



90 years experience



#trustmetsec

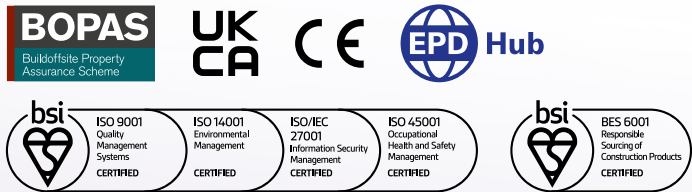

# CONTENTS

Introduction	5
What differentiates us?	6
Key Benefits	8
Accreditations	10
Sustainability	11
Metframe CPD Information	12
Metframe Perform Warranty	13
Metframe RIBA plan of work	14
The Concept	16
Metframe External Walls	23
Metframe Party Wall and Corridor Wall	28
Metframe Internal Wall	34
Metframe Internal Floors	38
Metframe Roofs	40
Metframe Stairwells	44
Metframe Lift Shafts	46
Metframe Hot Rolled Steel Design	50
Metframe Balconies	52
SER Submission (Scotland)	54







# INTRODUCTION

Metframe is voestalpine Metsec's modern, factory fabricated, pre-panelised framing solution. Manufactured off-site in a controlled, dry, high precision factory environment, Metframe panels and components offer a level of tolerance, efficiency, speed of supply and accelerated build time that simply can't be matched using traditional on-site techniques. Sustainability is at the forefront of Metframe buildings which can offer zero waste and a low carbon footprint.

Tight sites provide no barrier to construction when using Metframe. With projects often fitted between existing structures on tight inner-city sites, the Metframe system can be managed to work within confined spaces. Coordination of delivery sizes to match restrictive access into sites can be planned and managed within the office environment to avoid issues later arising on-site.

Boundary conditions from adjacent buildings driving the external wall fire performance can all be designed into the overall supplied product. Backed up by the extensive fire performance data that comes as standard with the Metframe system.

The Metframe Specification Guide is intended to enable design teams to make informed choices when specifying our Metframe system. We can offer a market leading choice of fire and acoustic laboratory data, through wall build-ups to meet your required U-value and standard Metframe junction details for architectural detailing. This guide contains the most commonly chosen solutions to meet both client and regulatory requirements, however our technical team are always on hand to provide tailored advice for your project needs.

## ELEMENTS COVERED ARE AS FOLLOWS:

- » **Off-site manufacturing to achieve factory level tolerances on-site**
- » **Metframe External wall**
- » **Metframe Party wall/Corridor**
- » **Metframe internal walls**
- » **Metframe internal floors**
- » **Metframe roofs**
- » **Metframe stairs**
- » **Metframe lift shafts**
- » **Metframe interaction with different ground bearing slabs or podiums by others**
- » **Metframe HR design**
- » **Metframe Balcony Support.**

Whilst all the information included is current at the time of review please visit our website to view the full and most up to date system choices, review our Introduction to Metframe Brochure, 3D interactive details or catch up with our latest animation of a Metframe in action at [www.metsec.com/products/metframe/](http://www.metsec.com/products/metframe/)

To contact a Metframe representative and discuss your requirements in further detail visit: [www.metsec.com/online-meeting-enquiry-metframe/](http://www.metsec.com/online-meeting-enquiry-metframe/)





# DIFFERENTIATION THROUGH STANDARDISATION

We understand that being different within the industry is not always about providing alternative solutions, it is being able to provide a consistent high-level approach which is far more standardised. Every building we undertake is unique, but standardisation of approaches and details at a higher level allows bespoke buildings to be designed and erected in a more efficient route, providing ongoing cost savings both on and off-site.

- » From the initial conceptual stage, your design team members have access to our concise details library online that provides trusted solutions for a large amount of different building details
- » Large, ongoing investment program to bring the most up to date fire and acoustic data direct to the customer allows us to provide market leading, independently accredited data direct to the industry without compromising choice
- » Covering elements from simple member connections through to complex balcony supports
- » Well established nationwide support network backed up by our in-house technical team
- » Early engagement via a managed standardised approach provides solutions that create efficiencies
- » Individual project solutions can be discussed directly. Trusted and tested solutions can drive cost efficiencies whilst balanced against the specific client's requirements.

# STANDARDISATION THROUGH DIFFERENTIATION


## What differentiates us?

voestalpine Metsec have an enviable reputation for their market leading support driven by its people. Provided from decades of in-house technical knowledge built over the last thirty years.

Investment in people nurtured from high calibre graduates, and from our industry leading apprentice program ensures that the knowledge is retained, developed and passed on for the benefit of all of our customers. This manifests itself in establishing award winning in-house software solutions with top tier software houses creating bespoke solutions. This allows us to seamlessly translate 3D models to physical structures on-site.

Utilising Metframe's individually tailored route to market we are able to offer the most cost-efficient solutions for each stage of the project process by allowing specific areas of expertise to engage at key points. Rather than offer a single standardised approach, Metframe and our key strategic partners are able to offer their knowledge and expertise at each relevant stage from the initial design conception stage through to project completion.

voestalpine Metsec were the first tier two company to achieve the highly respected BSI kitemark for BIM Level 2 which means on a project there is a far easier integration of Metframe within the design team. The movement of the industry to implement a consistent approach to project management is a requirement that voestalpine Metsec and Metframe is already well placed to accommodate.

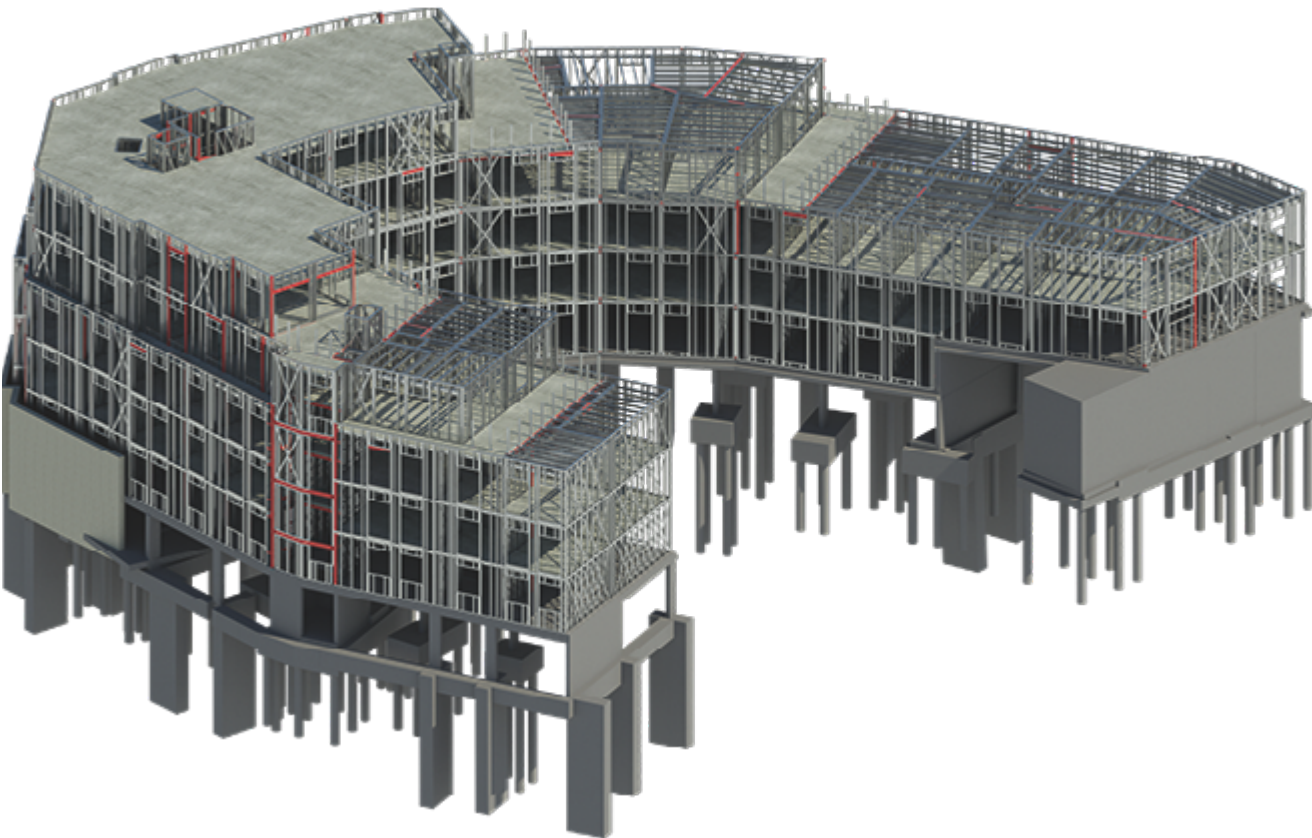





# KEY BENEFITS

The list of Metframe's benefits is a long one, the system offers a number of clear commercial and technical advantages to our customers.

## SPEED

- » Pre-fabricated off-site construction gives a fast build program, typically 30% faster build time compared to traditional methods
- » Early Dry Envelope can be achieved
- » NHBC/SCI Accredited Edge Protection system tailored to suit each individual project
- » Floor typically constructed in 2-3 weeks, based on 1000m<sup>2</sup> floor areas
- » Stairs and lift shafts installed as the building progresses floor by floor
- » Faster completion dates can lead to earlier occupancy leading to overall project savings against more traditional build methods.

## TECHNICAL KNOWLEDGE AND SUPPORT – BIM LEVEL 2

- » In-house 3D design
- » In-house engineers with decades of experience in light gauge steel framing
- » Using the most up to date detailing software that links directly in with our modern on-site manufacturing facility
- » The ability to translate from theoretical models to physical structures is easy
- » A huge catalogue of tested data that encompasses all the major board manufacturers for both fire and acoustic performances, internal and external
- » Metframe offers not only a cost benefit but also provides safe, industry leading solutions
- » Collaborative working environment
- » Hot rolled steel integrated into the 3D model.

## ENVIRONMENTAL

- » Engineered solution to exact building requirements results in zero waste for the main structure
- » High thermal and acoustic performance solutions
- » Lightweight construction
- » ISO 14001 – Environmental management system
- » BES6001 – Responsible sourcing of products – very good standard
- » ISO 45001 – Occupational Health and Safety Management certification
- » FORS – Silver Accredited for HGV Metsec deliveries
- » Less time on-site and small build teams means lower environmental impact on the site and surrounding areas.

## FLEXIBILITY

- » Different types and complexity of structures are easily incorporated within the Metframe system
- » Our system caters for:
  - » Balconies
  - » Lift shafts
  - » Brickwork support
  - » Stair cases
  - » Walkways
- » Independent and accredited edge protection system
- » Plasterboard packs and bathroom pods can be coordinated during the build phase
- » Window support can be designed
- » Suitable for use with a variety of external finishes
- » New Metsec range offers savings in cost and weight.

## QUALITY AND UKAS ACCREDITED TESTING

- » Precision steel design with a high degree of tolerance and dimensional accuracy means no shrinkage
- » Metsec has some of the most up to date fire and acoustic data for any LGS frame available
- » Our fire performance data is tested or assessed at the UK's leading Test Centre – The BRE – over 250 combinations
- » Technical accuracy leading to factory tight tolerance in an on-site built environment
- » We have a BSI Kitemark for BIM Level 2
- » We are UKCA & CE Marked up to EXC 4
- » We have NHBC/SCI approval up to 15 storeys
- » Our structural engineers are able to assist with design
- » We work with specialist installation partners
- » Information Security Management system accreditation
- » Manufactured in a controlled factory environment.





# ACCREDITATIONS

	<b>UKCA Certificate</b> <b>BS EN 1090 1:2009+A1:2011</b>	UK Conformity Assessed marking is a mark that indicates conformity with the applicable requirements for products sold within Great Britain.
	<b>CE Marking Certificate</b> <b>EN 1090-1:2009+A1:2011</b>	CE marked products are a legal requirement for the Metframe market as of 1st July 2014
	<b>Kitemark Certificate</b> <b>BS EN ISO 19650-2:2018 (BIM)</b>	An international standard for managing information over the whole life cycle of a built asset using building information modelling (BIM).
	<b>SCI/NHBC Stage 1 System Certification for Metframe Systems</b>	NHBC Standards require manufacturers of light steel frame systems to submit a system manual to SCI for assessment. This is a requirement for obtaining an NHBC Warranty for the building. The NHBC/SCI approval covers buildings up to 15 storeys.
	<b>Considerate Constructors Certificate</b>	Designed to encourage best practice beyond statutory requirements. voestalpine Metsec is awarded a rating of 'excellent' across all areas of assessment.
	<b>Build off site Property Assurance Scheme (BOPAS)</b>	BOPAS provides assurance that construction systems designed, manufactured and installed by voestalpine Metsec will conform to industry best practices in terms of durability and system integrity.
	<b>Responsible Sourcing of Construction Products BES 6001:Issue 3.1</b>	To ensure and then prove that our products have been made with constituent materials that have been responsibly sourced.
	<b>Energy Management System ISO 50001:2018</b>	This certification demonstrates our commitment to continual effort in establishing, implementing, maintaining and improving an energy management system.
	<b>Quality Management System ISO 9001:2015</b>	This standard demonstrates our ability to consistently provide products and services that meet customer and regulatory requirements.
	<b>Environmental Management System ISO 14001:2015</b>	This is the principal management system standard that specifies the requirements for the formulation and maintenance of an EMS. This helps to control your environmental aspects, reduce impacts and ensure legal compliance.
	<b>Occupational Health &amp; Safety Management System ISO 45001:2018</b>	An international standard for health and safety at work developed by national and international standards committees independent of government.
	<b>Integrated Management Registration PAS 99:2012</b>	Helps us achieve benefits by integrating the common requirements of all management system standards and specifications and managing these requirements effectively.
	<b>Information Security Management System ISO/IEC 27001:2013</b>	An information security standard created by the ISO, which provides a framework and guidelines for establishing, implementing and managing an information security management system (ISMS).



# SUSTAINABILITY

**voestalpine Metsec are fully committed to protecting the environment and we are continually looking for new ways to improve our environmental performance.**

voestalpine Metsec is committed to undertaking its activities in an efficient and financially sustainable manner in-line with environmental best practice and meeting the requirements of ISO 14001. This will be achieved by complying with applicable laws and regulations and by reducing environmental impacts from our operations. Environmental management through process improvements, good manufacturing, pollution control practices and employee education is a primary management objective, as well as a responsibility of every voestalpine Metsec employee. voestalpine Metsec's aim is to provide its customers with products with the best added value but with the lowest environmental impact in terms of production, use and disposal.

## COUNTDOWN TO ZERO

Metsec is part of the voestalpine Group and they are working to meet a challenge; the goal of zero carbon emissions in the Metal Forming Division by 2035. Already today, numerous projects to save energy, optimise processes, source green electricity, or even to generate our own renewable energy are underway at our locations around the world, together with efforts to motivate our suppliers to implement their own climate protection measures.

## ISO 50001

ISO 50001 helps organisations improve its energy performance and reducing its environmental impact. The ISO 50001 standard for energy management systems can help safeguard our future by making a positive difference in the here and now.

Achieving ISO 50001 certification within Energy Management Standards portrays voestalpine Metsec's commitment to energy efficiency throughout the business, working towards a beneficial, secure long term energy supply and heightening employee awareness.

## EPD

An Environmental Product Declaration (EPD) is required on major developments in London.

Architects, developers, building services engineers or sustainability engineers will require an EPD to ensure the energy strategy for any major projects in London, meets planning requirements at design stage.

voestalpine Metsec's publication of the EPD underlines the company's commitment to sustainability and follows swiftly on the heels of its parent company, voestalpine AG, announcing a major initiative to achieve net zero carbon emissions in its Metal Forming Division by 2035, some fifteen years ahead of the targets set by the Intergovernmental Panel on Climate Change.

Assurance of a system's environmental credentials comes from a manufacturer's Environmental Product Declaration (EPD). Compiled in accordance with EN 15804+A2 and ISO 14025/ISO 21930, the EPD covers all aspects of the products' environmental credentials, from manufacture and transport to end of life. The EPD includes a life-cycle assessment and environmental impact data comprising core environmental impact indicators, use of natural resources and end of life information.

Verified by independent EPD authority, EPD Hub, the declaration provides designers, specifiers and developers with comprehensive information to include in a project's sustainability assessment.





# METFRAME CPD INFORMATION

If you are looking to increase your knowledge of steel framing systems, including design and specification, the Metsec Metframe CPD seminar provides a comprehensive and engaging opportunity to do so.

Our Metframe CPD seminar provides the following:

- » Introduction to Metframe and its applications
- » Key benefits of the Metframe system
- » Construction sequence
- » Design and detailing process including BIM
- » Wall build ups and performance data

Metsec has many years of experience working with main contractors, architects, engineers and sub-contractors to efficiently design and supply Metframe systems. There is no company better placed to get your Metframe knowledge up to speed.

For more information on the Metsec Metframe CPD seminar, please get in touch. [metsec.plc@voestalpine.com](mailto:metsec.plc@voestalpine.com)



# METWALL PERFORM WARRANTY

MetWALL Perform, is an industry changing 30 year warranty giving architects, developers and contractors reassurance when specifying through wall products on voestalpine Metsec steel frame systems.

This is an important addition to voestalpine Metsec's unique Framing range providing warranted UKAS tested wall combinations, enabling clients to select the most cost effective performance design solutions.

The warranty is an insurance backed product, based on the wide-ranging performance of voestalpine Metsec's own test assessments. voestalpine Metsec has accumulated this test data over years of dynamic testing at UKAS approved testing facility.

All test data is based on unique UKAS accredited tests and UKAS recognised scope of testing:

### Fire

- » Based on testing to BS EN 1364-1:2015 for infill walling and BS EN1365-1:2012 for load bearing systems
- » Solutions for multiple sheathing board options including RCM Y-Wall, Euroform Versaroc, Siniat Weather Defence, British Gypsum Glasroc X and Knauf Windliner
- » Solutions for both Rockwool Duoslab and Knauf Rocksilk insulation.

### Acoustic

- » Tested performances for wall and floors to meet building regulations part E
- » Solutions to meet Part E +5dB and Silver standard in Scotland
- » All laboratory acoustic tests carried out in accordance with BS EN ISO 10140-2:2010 and BS EN ISO 140-3:1995
- » If Acoustic performance figure is assessed, it will clearly state this and on what basis in the performance tables within this document.

### Thermal

- » Solutions ranging from a U-value of 0.3 down to 0.1
- » Non-combustible insulation options
- » All U-Values are based on calculations carried out by voestalpine Metsec plc to BS EN ISO 6946 and BR 443. The example values are based on published values for the stated insulation types. U-Value calculations should be verified by the insulation provider..

### Structural

- » High Strength, low weight steel sections designed to BS EN 1993
- » Design department run by our own employed chartered structural engineers.






# METFRAME RIBA PLAN OF WORK

Early engagement with Metsec can enable the design team to ascertain the feasibility and demonstrate value in the system. Our in-house expertise and national support team are available to discuss and develop projects with you. Engaging with us at Concept Design stage provides the most cost efficient structural solution.

Our support continues through the Developed Design stage where our experienced in-house Engineers provide design schemes to ascertain programme and cost plans, and look at efficiencies in the frame, finishes and linings.

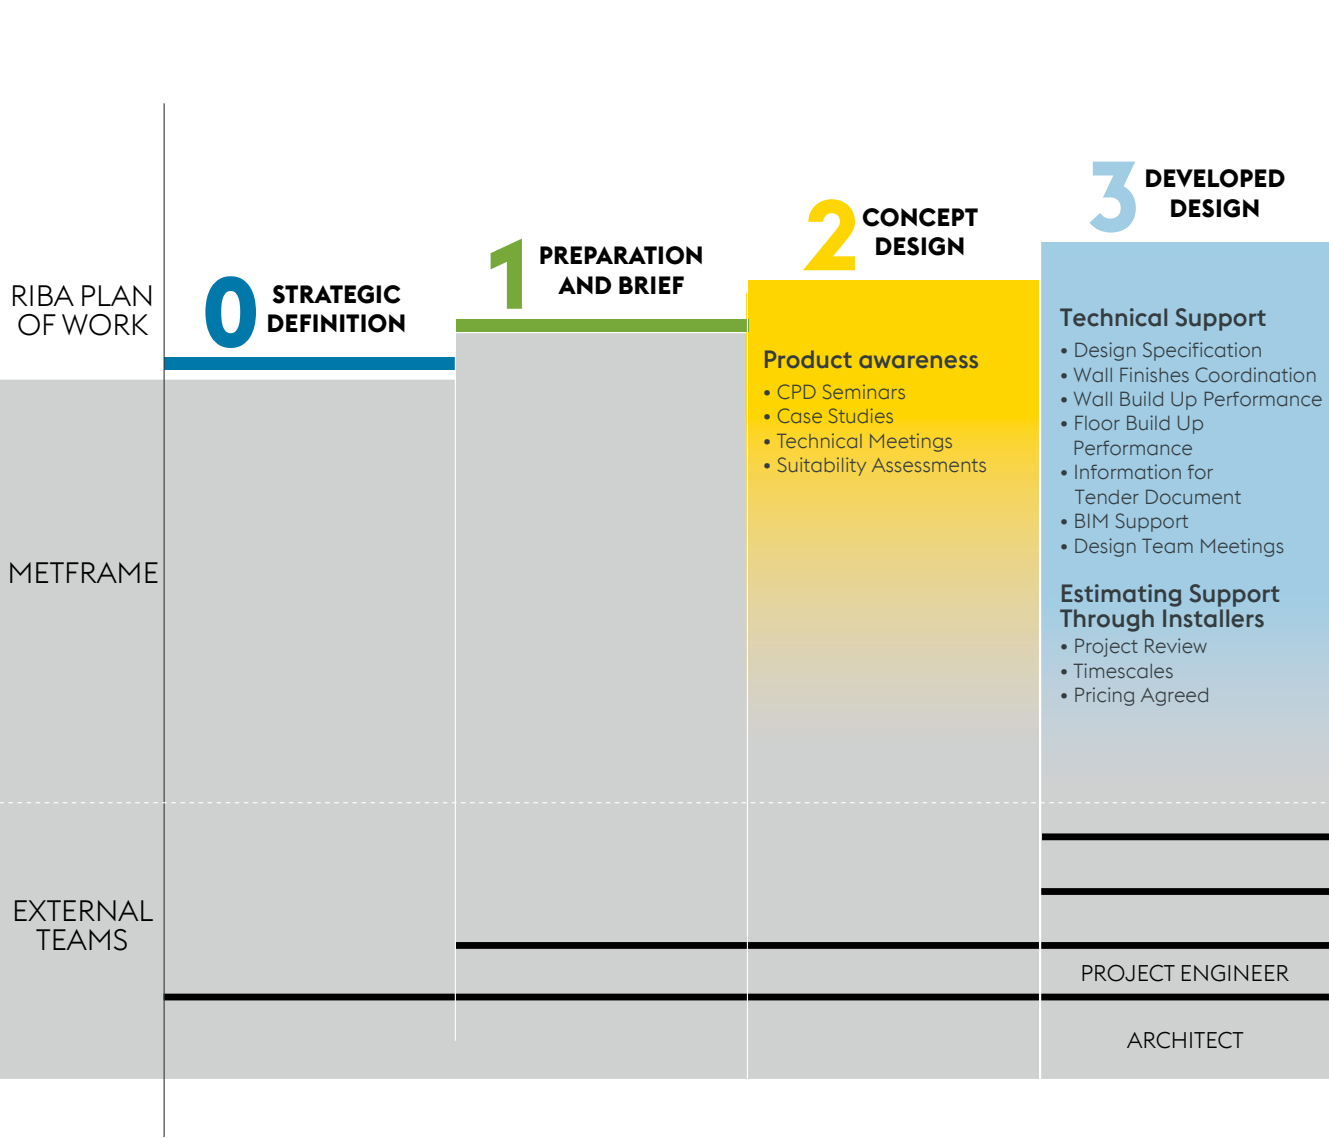


Once the project is successfully awarded the full structural calculations are carried out and then modelled in a BIM compliant 3D format using Tekla. This enables design teams to integrate models allowing clash detection and overall set out checks to be carried out. From this base model deliveries are coordinated in line with the just-in-time sequence. The model can also assist in achieving environmental targets by manufacturing with zero waste.

Once the finished frame is signed off by the design team we manufacture the cold rolled sections in precise lengths and the panels are assembled off-site by approved Metframe installers. External

wall panels are typically pre-clad with a non-combustible sheathing board, to ensure a weather resistant envelope is achieved quickly. Site visits can be undertaken by Metsec to ensure the quality of the finished frame.

After project completion, Metframe can provide drawing information updated to "As Built" status, supported with a set of structural calculations for the clients operations and maintenance manual. This is all supported by an insurance backed collateral warranty from voestalpine Metsec plc part of the multi-national voestalpine AG.

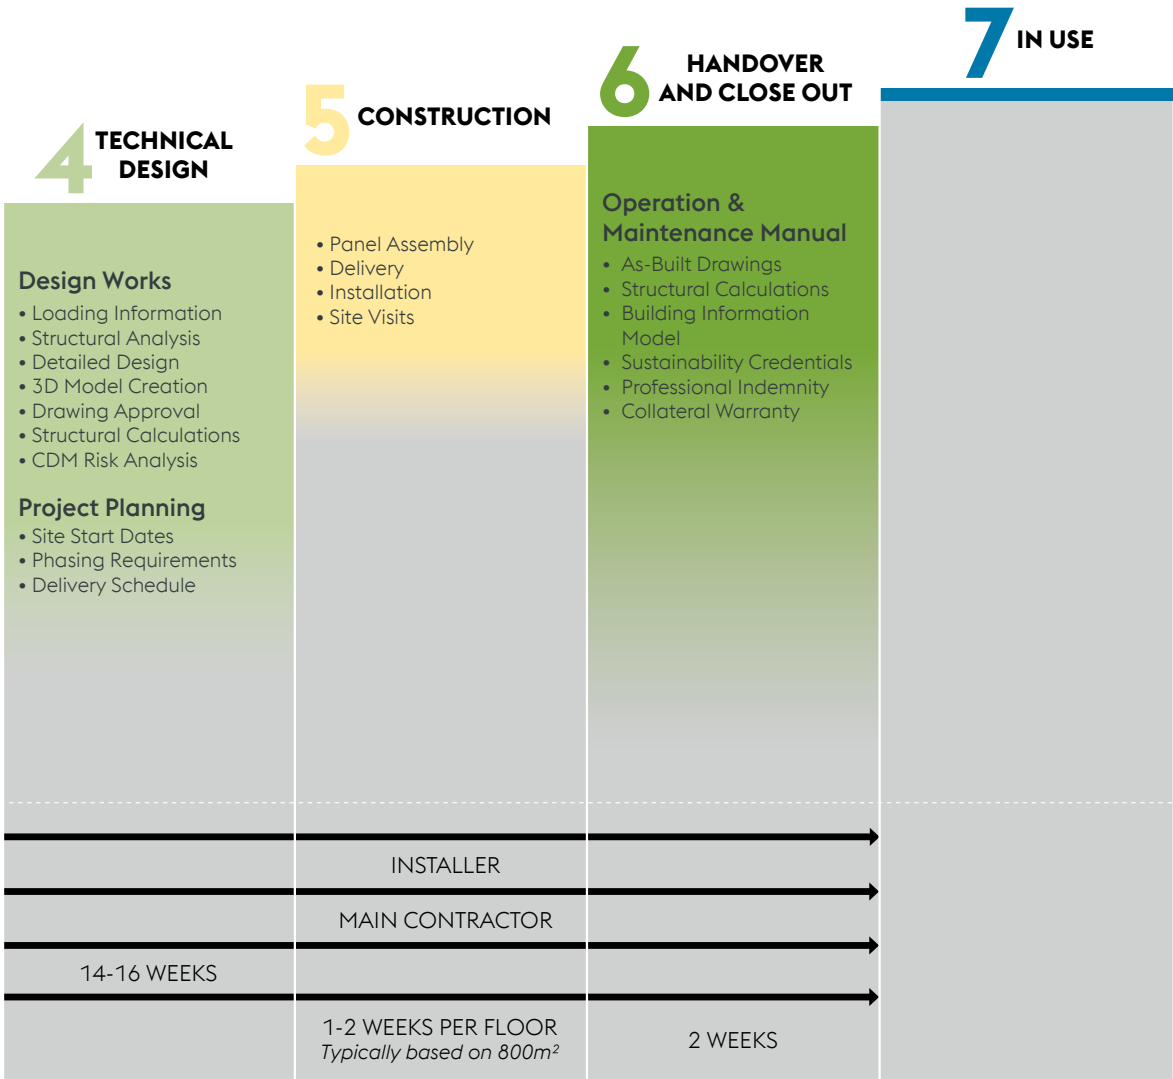



# THE CONCEPT

# THE METHOD



### CPD

voestalpine Metsec plc offer CPD's and seminars to help increase your understanding of the Metframe system including its benefits and limitations. Please contact us for more details.



### OFF-SITE MANUFACTURE


Sections are manufactured to bespoke lengths at Metsec straight from the 3D model ensuring accuracy. The panels are then assembled by a Metsec approved installer in their production facilities.

External wall panels can be pre clad with UKAS accredited tested combinations of sheathing boards, and insulation. This enables a weather tight envelope to be achieved quickly, and also ensuring you hit the regulatory requirements for fire, thermal and acoustics.




### INITIAL CONSULTATION

Initial Design feasibility can be carried out by our in-house experienced engineers with cost and program provided by one or all of our experienced installation partners.

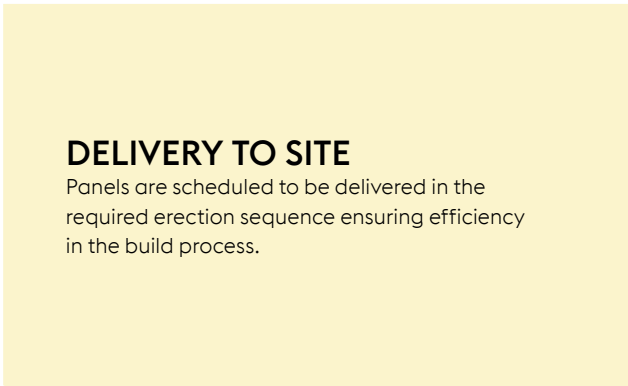


### DELIVERY TO SITE

Panels are scheduled to be delivered in the required erection sequence ensuring efficiency in the build process.

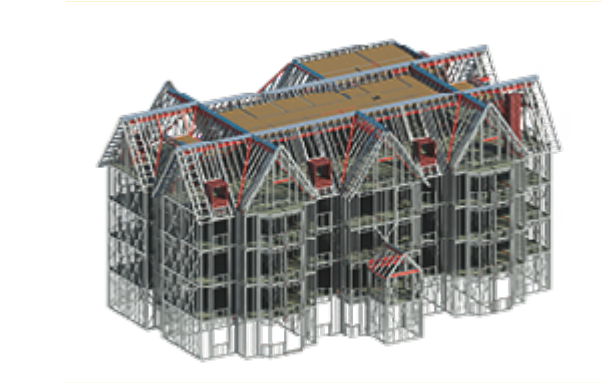

### DESIGN WORK

voestalpine Metsec's in-house design team will create a BIM compliant model. Metsec were the first manufacturer in the UK to obtain BIM Level 2 accreditation for model and BIM objects. The advantages of BIM in this collaboration stage means tighter tolerances with less unforeseen errors on-site.

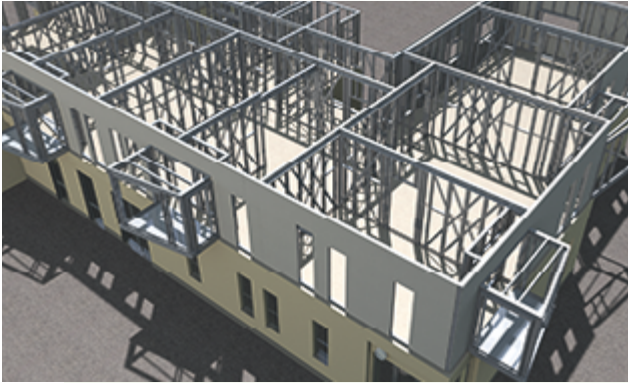


### ERECTION OF PANELS

Panels are then craned into position, where they are fixed down and bolted together by voestalpine Metsec approved installation partners. Further panels are quickly fixed into position.

Wall panels incorporate cross bracing in order to provide stability to the structure reducing the need for hot rolled steel or concrete.





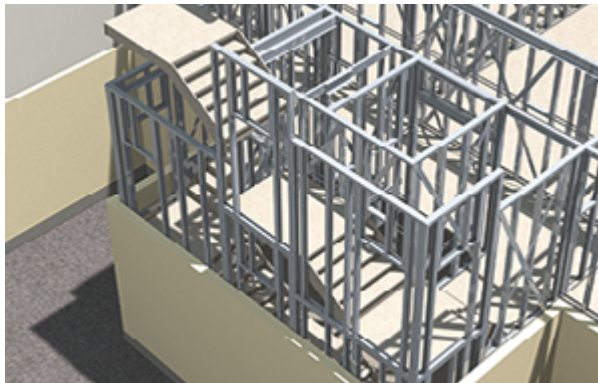


## INSTALLATION OF STAIRS, LIFT SHAFTS, PLASTERBOARD AND BATHROOM PODS

An integral part of the Metframe system is the installation of stairs and lift shafts as each floor is constructed. This reduces the need for external scaffold for access to upper levels, reducing cost, providing convenience and speed to the erection process.

Fast and efficient erection is also helped by the ability to crane in bathroom pods and plasterboards packs for follow on trades, speeding up overall build programme.

## METAL DECKING INSTALLED AND CONCRETE POUR

Composite metal decking is installed and fitted onto to the Z ledger incorporated within walls panel. Rebar and crack control mesh is installed to meet the buildings specific fire and robustness requirements. (Lightweight steel joisted floors can be utilised as an alternative to concrete.) Concrete is poured into place to form a floor offering high fire and acoustic performance. The concrete floor enable's this modern method of construction to still achieve a traditional feel once inhabited.

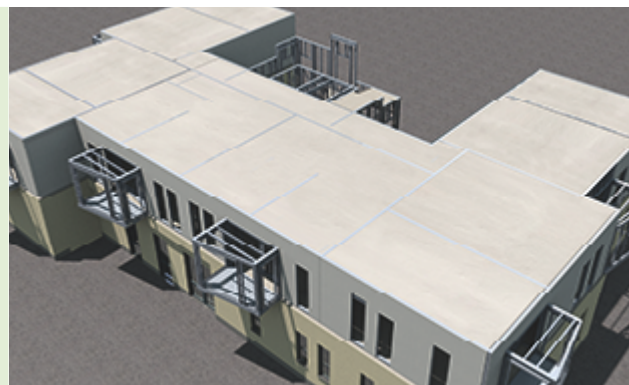

## SUBSEQUENT FLOORS ERECTED AND FINISHED BUILDING

This process is repeated and subsequent floors are typically constructed at a rate of 2-3 weeks. Certain follow on trades can start as soon as work progresses to the floor above. The structural roof solution is installed which with the flexibility of the Metframe system, allows this to be formed flat or pitched to suit the aesthetics of your building. These can be formed in concrete, lightweight steel roof cassettes, steel purlins or timber trusses.








Click on the i symbol for more information


## METFRAME ROOFS

Page 40-43

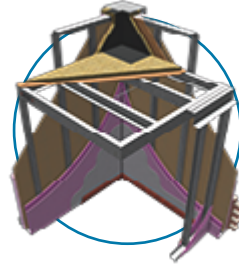


## METFRAME LIFT SHAFTS

Page 46-48

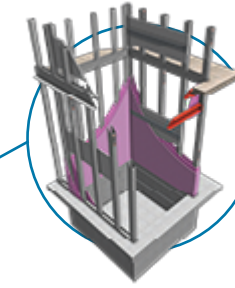




## METFRAME STAIRWELLS

Page 44-45

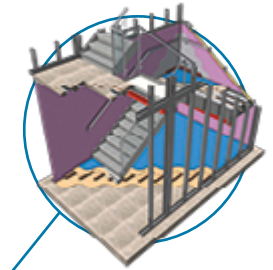

## METFRAME BALCONIES

Page 52-53

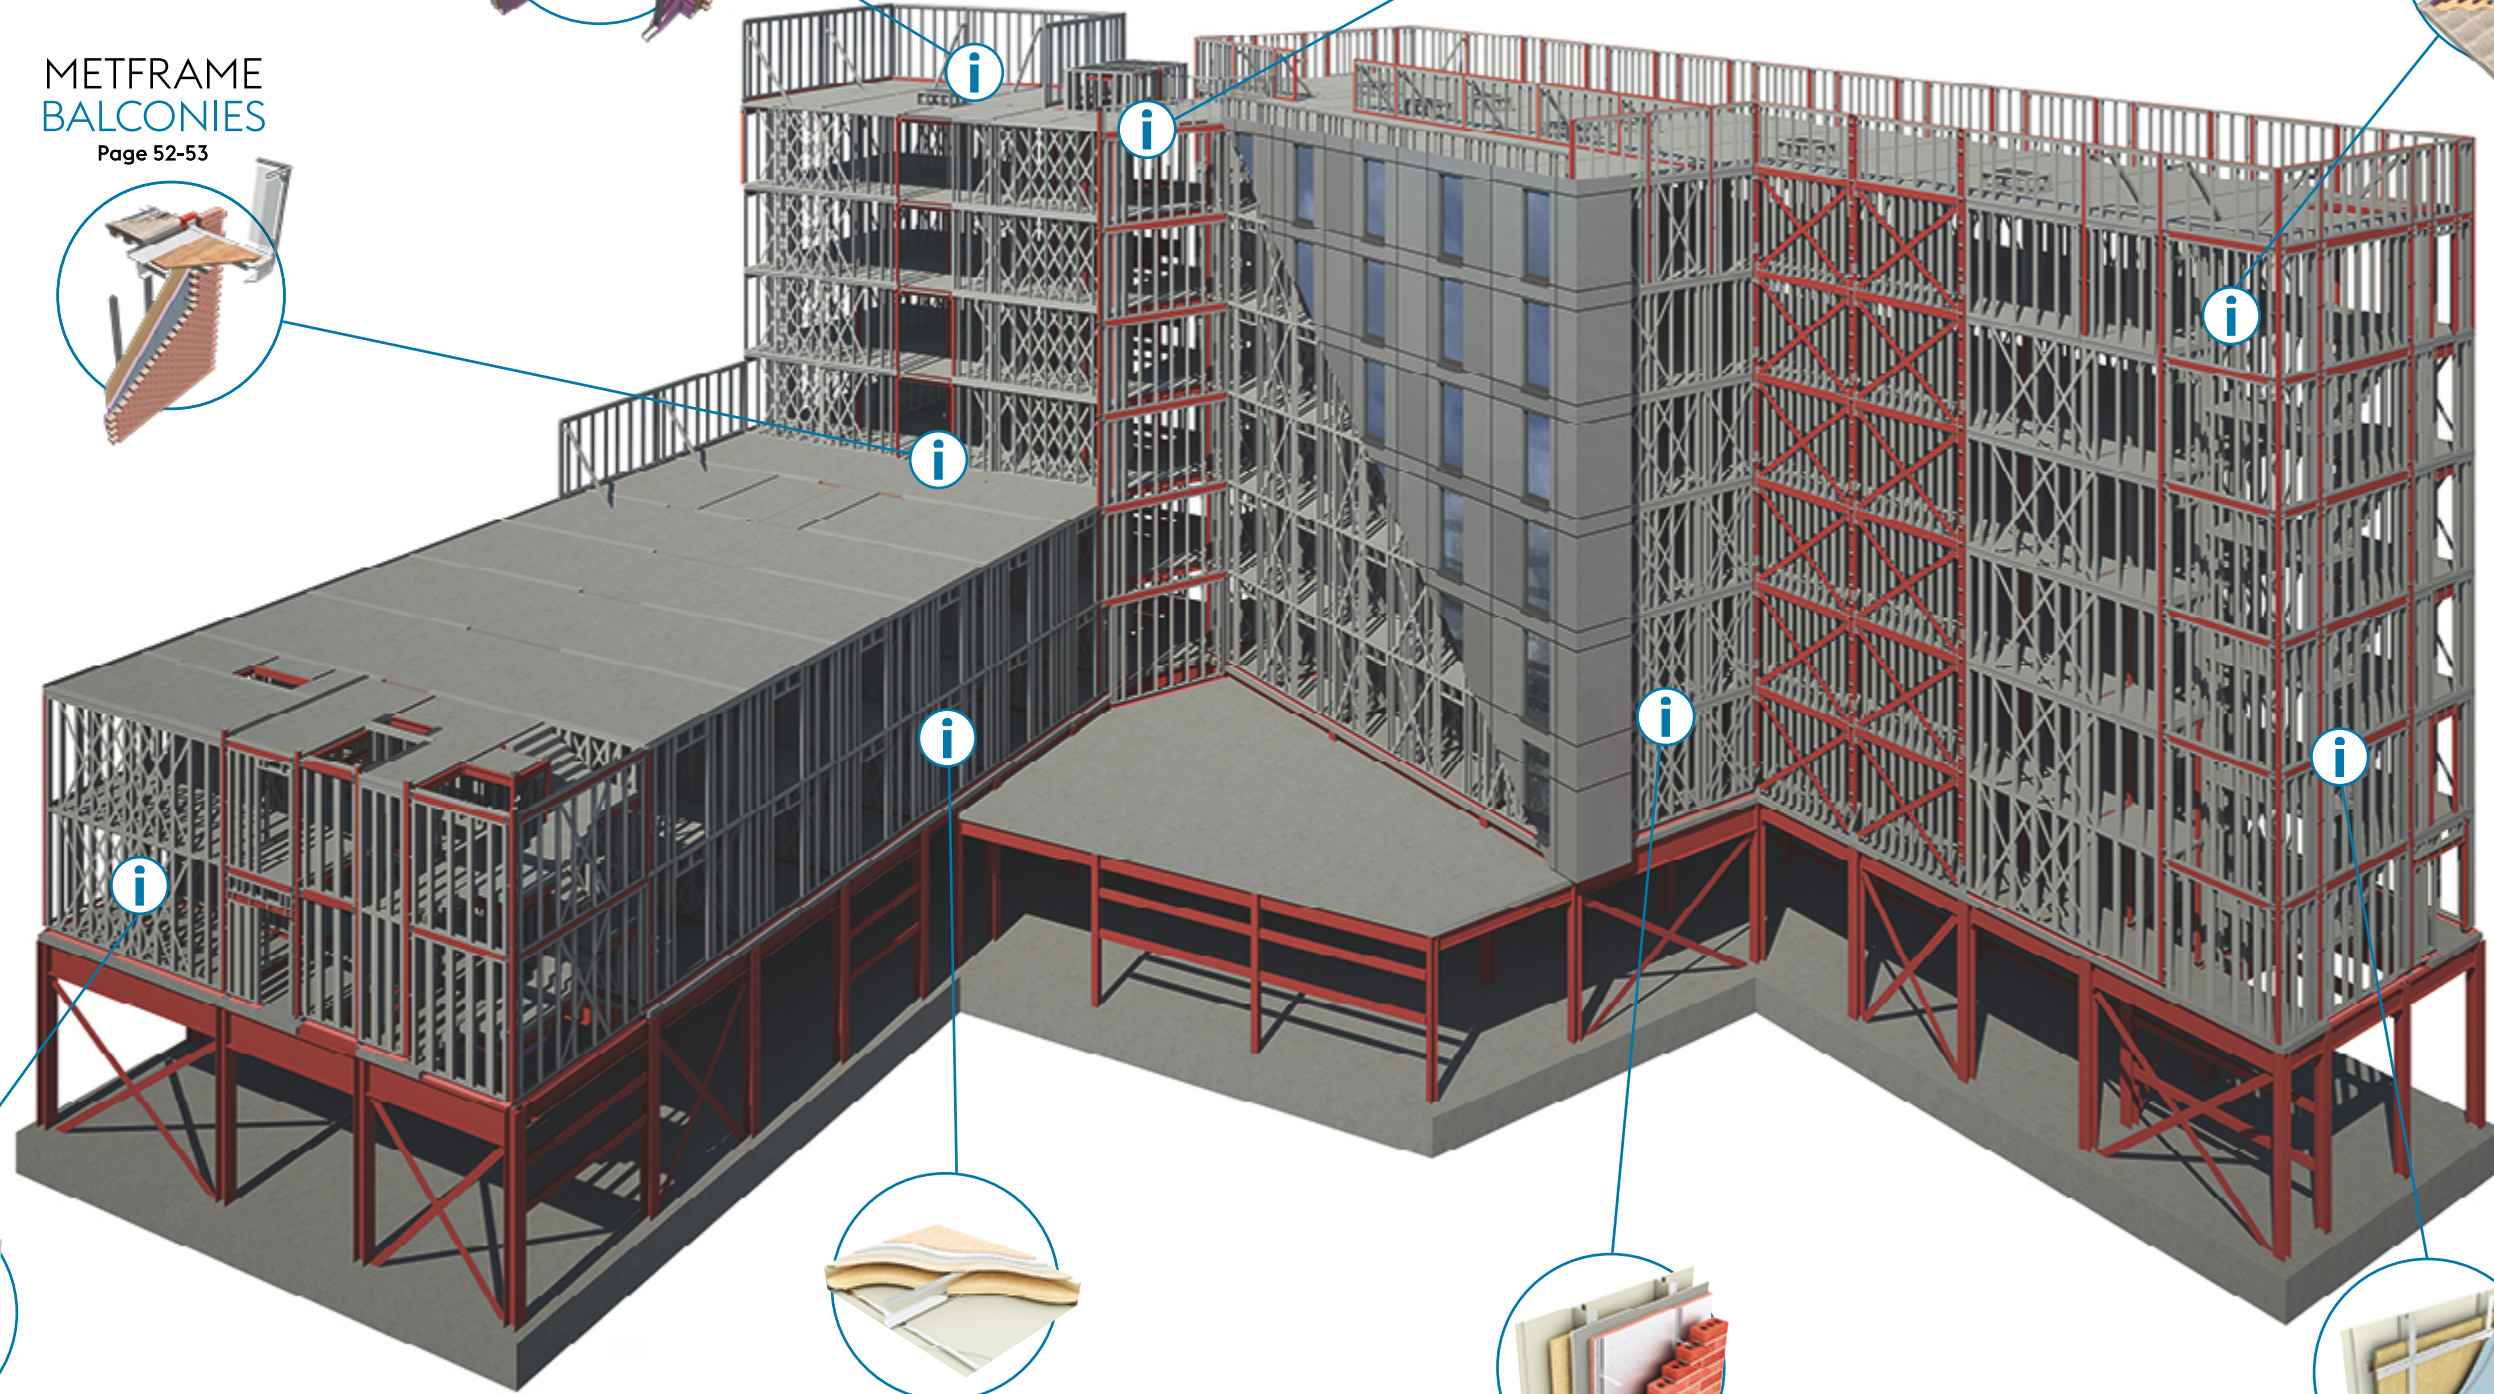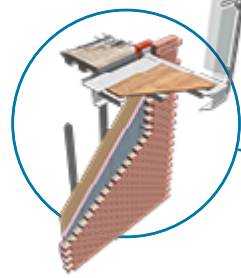


## METFRAME INTERNAL WALLS

Page 34-37




## METFRAME INTERNAL FLOORS

Page 38-39



## METFRAME EXTERNAL WALLS

Page 23-27



## METFRAME PARTY WALL AND CORRIDOR WALL

Page 28-33







# METFRAME

## EXTERNAL WALLS


Typical build-ups based on brickwork, rainscreen, timber cladding and insulated render façades. Each option uses either Rockwool Duo Slab or Kingspan K15 foil faced insulation to the external face and additional ISOVER 50mm APR 1200 insulation to the cavity of the Metframe stud.



**Option 1**  
Type EC1i: Two layers of minimum 12.5mm British Gypsum Fireline plasterboard, stud with ISOVER 50mm APR 1200 between, sheathing board, Rockwool Duo Slab Insulation, 50mm cavity, brickwork.




**Option 2**  
Type EC1i: Two layers of minimum 12.5mm British Gypsum Fireline plasterboard, stud with ISOVER 50mm APR 1200 between, sheathing board, Kingspan K15 Insulation, 50mm cavity, brickwork.

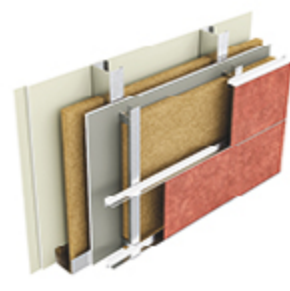

**Option 3**  
Type EC1i: Two layers of minimum 12.5mm British Gypsum Fireline plasterboard, stud with ISOVER 50mm APR 1200 between, sheathing board, Rockwool Duo Slab Insulation, ventilated rainscreen.



**Option 4**  
Type EC1i: Two layers of minimum 12.5mm British Gypsum Fireline plasterboard, stud with ISOVER 50mm APR 1200 between, sheathing board, Kingspan K15 Insulation, battens, timber cladding.

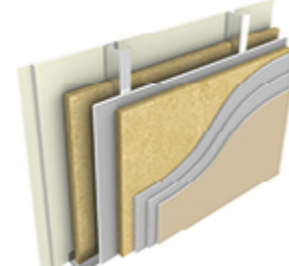

**Option 5**  
Type EC1i: Two layers of minimum 12.5mm British Gypsum Fireline plasterboard, stud with ISOVER 50mm APR 1200 between, sheathing board, drainage cavity, Rockwool Duo Slab Insulation, render.

Examples of external insulation thickness based on **TARGET U VALUES 0.15, 0.20, 0.25 W/m²K**



	Option 1	Option 2	Option 3	Option 4	Option 5
U- Value Required	Rockwool Duo Slab (mm)	Kingspan K15 (mm)	Rockwool Duo Slab (mm) (Support brackets @ 900mm centres)	Kingspan K15 (mm)	Rockwool Duo Slab (mm)
0.25	75	40	100	60	75
0.20	100	60	150	80	100
0.15	150	95	230	110	150

**Note:** All U-Values are based on calculations carried out by voestalpine Metsec plc to BS EN ISO 6946 and BR 443. The example values are based on published  $\gamma$  values for the stated insulation types; RCM Y-Wall sheathing board; 100MF12 studs at 600mm centres; and 2x12.5mm British Gypsum Gyproc Fireline. U-Value calculations should be verified by the insulation provider.







# DETAIL MF008 METFRAME PANEL AND FOUNDATION INTERFACE (Viewed externally)

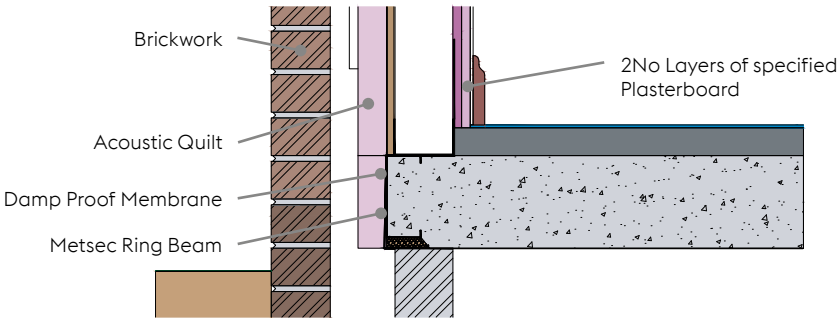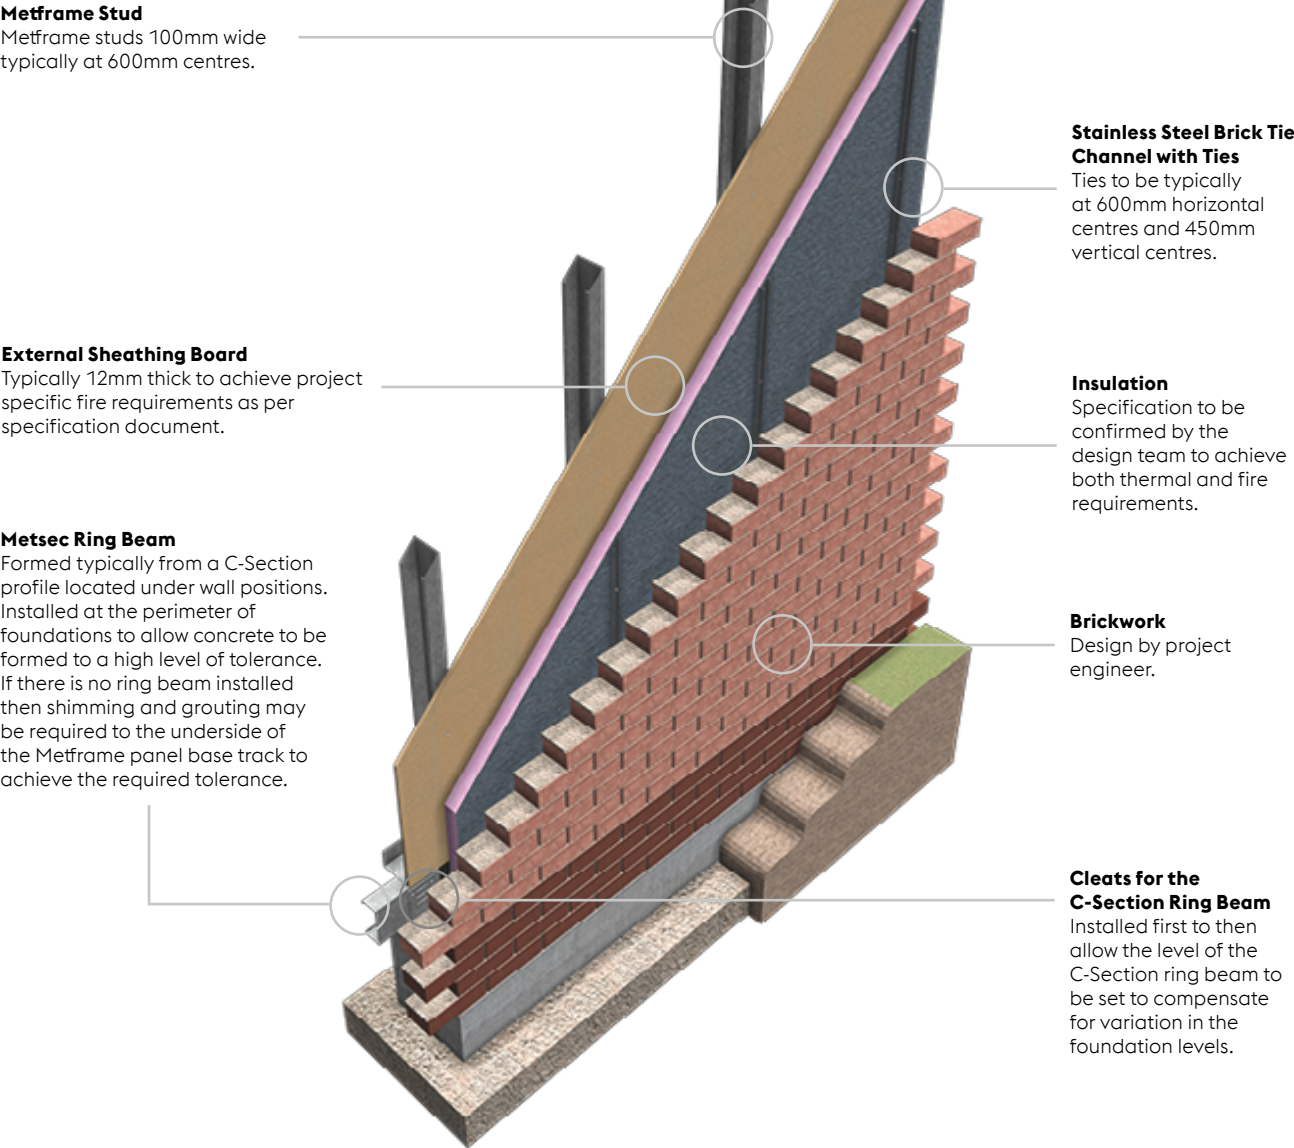


Section on Ring Beam and Panel Interface


# DETAIL MF008 METFRAME PANEL AND FOUNDATION INTERFACE (Viewed internally)

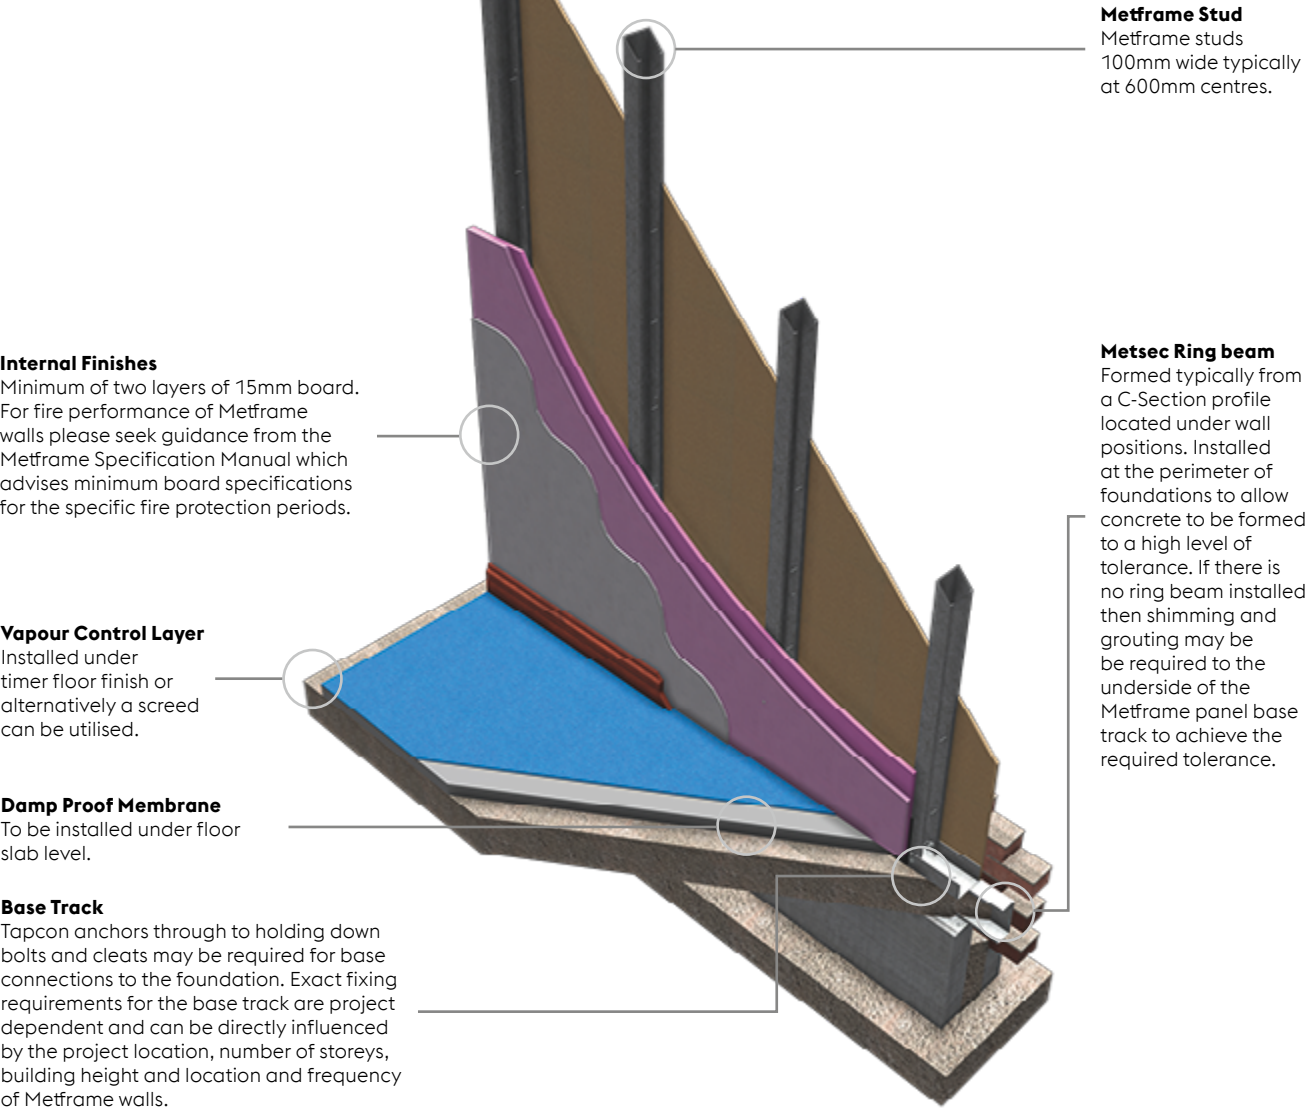

Front View on Ring Beam Cleat

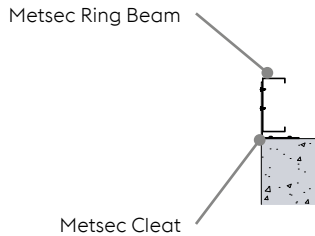

Section of Ring Beam Cleat





Plan on Ring Beam Cleat







# DETAIL MF003 EXTERNAL WALL WITH BRICKWORK AND CONCRETE FLOOR (VIEWED EXTERNALLY)

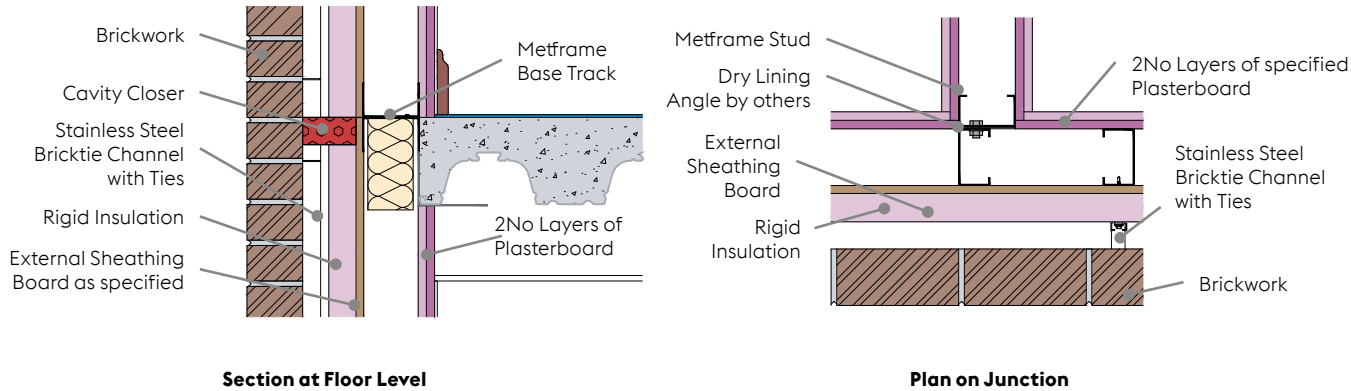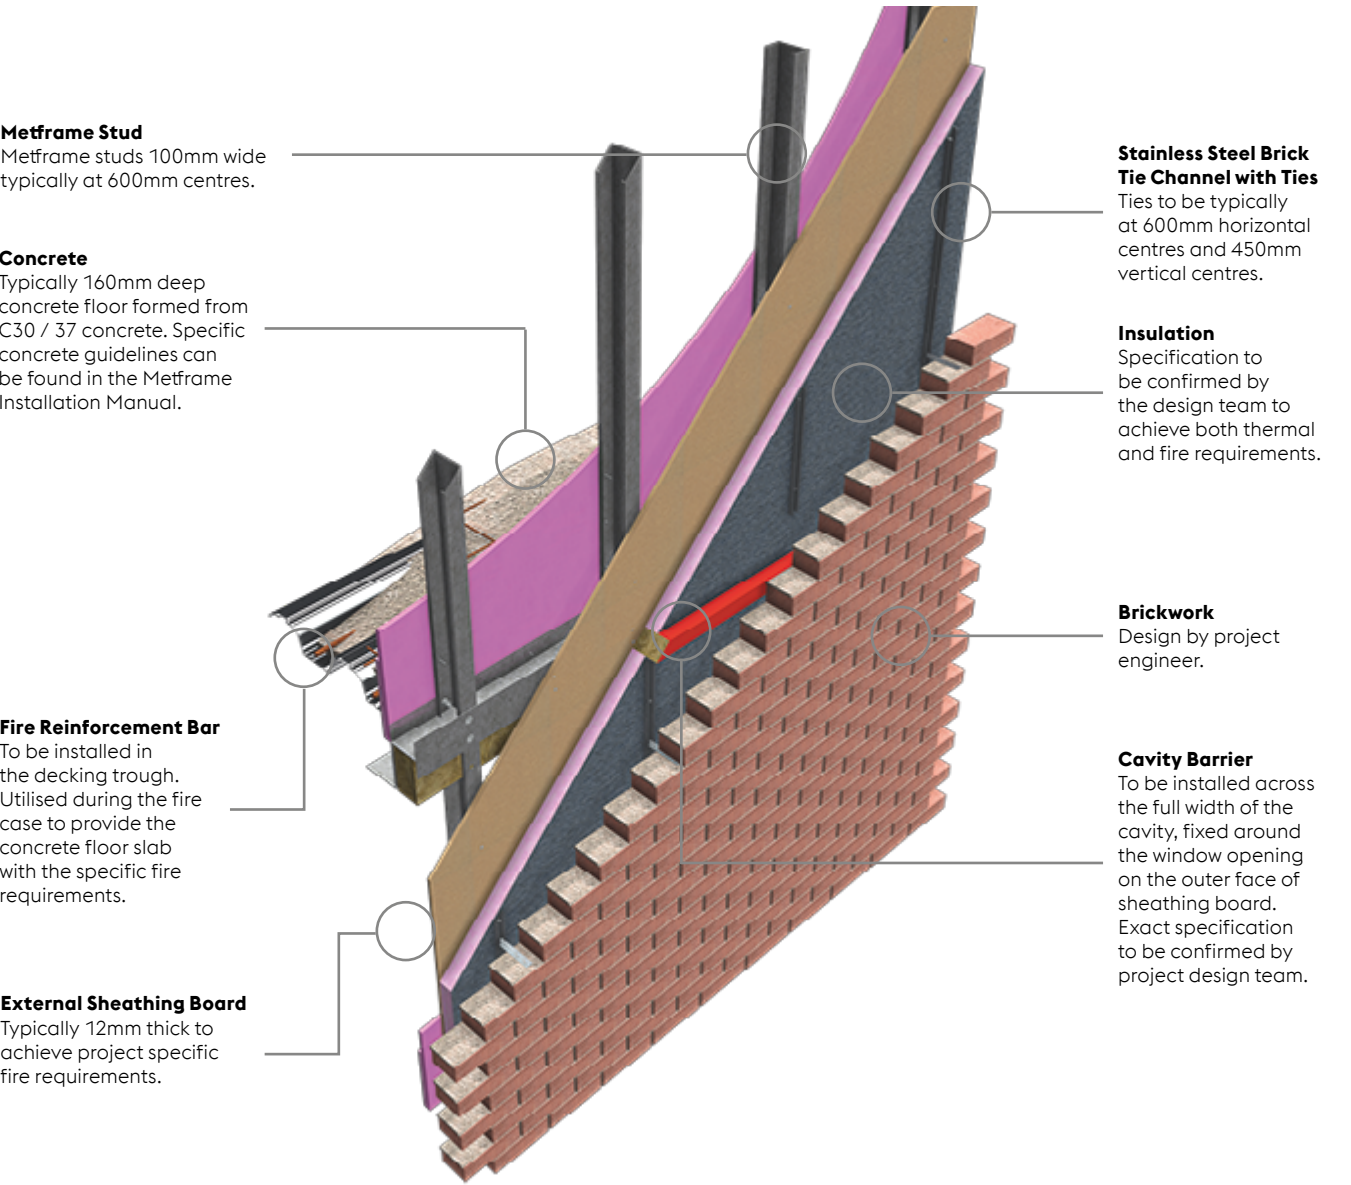


# DETAIL MF001 WINDOW DETAIL WITH BRICKWORK (Viewed Externally)

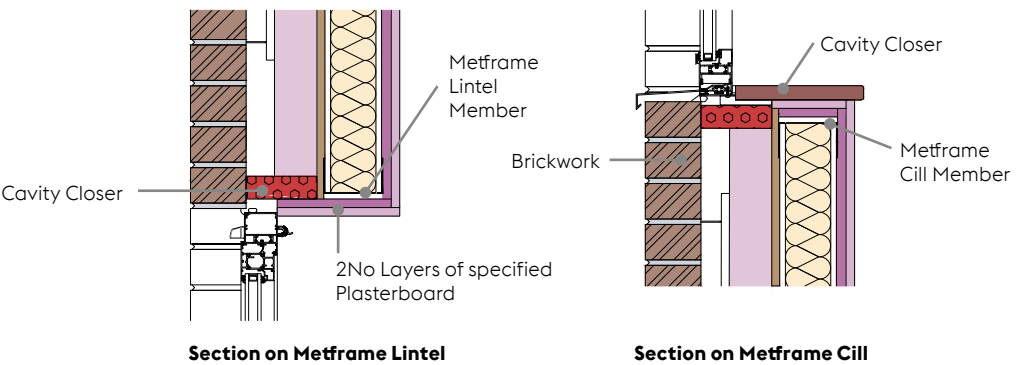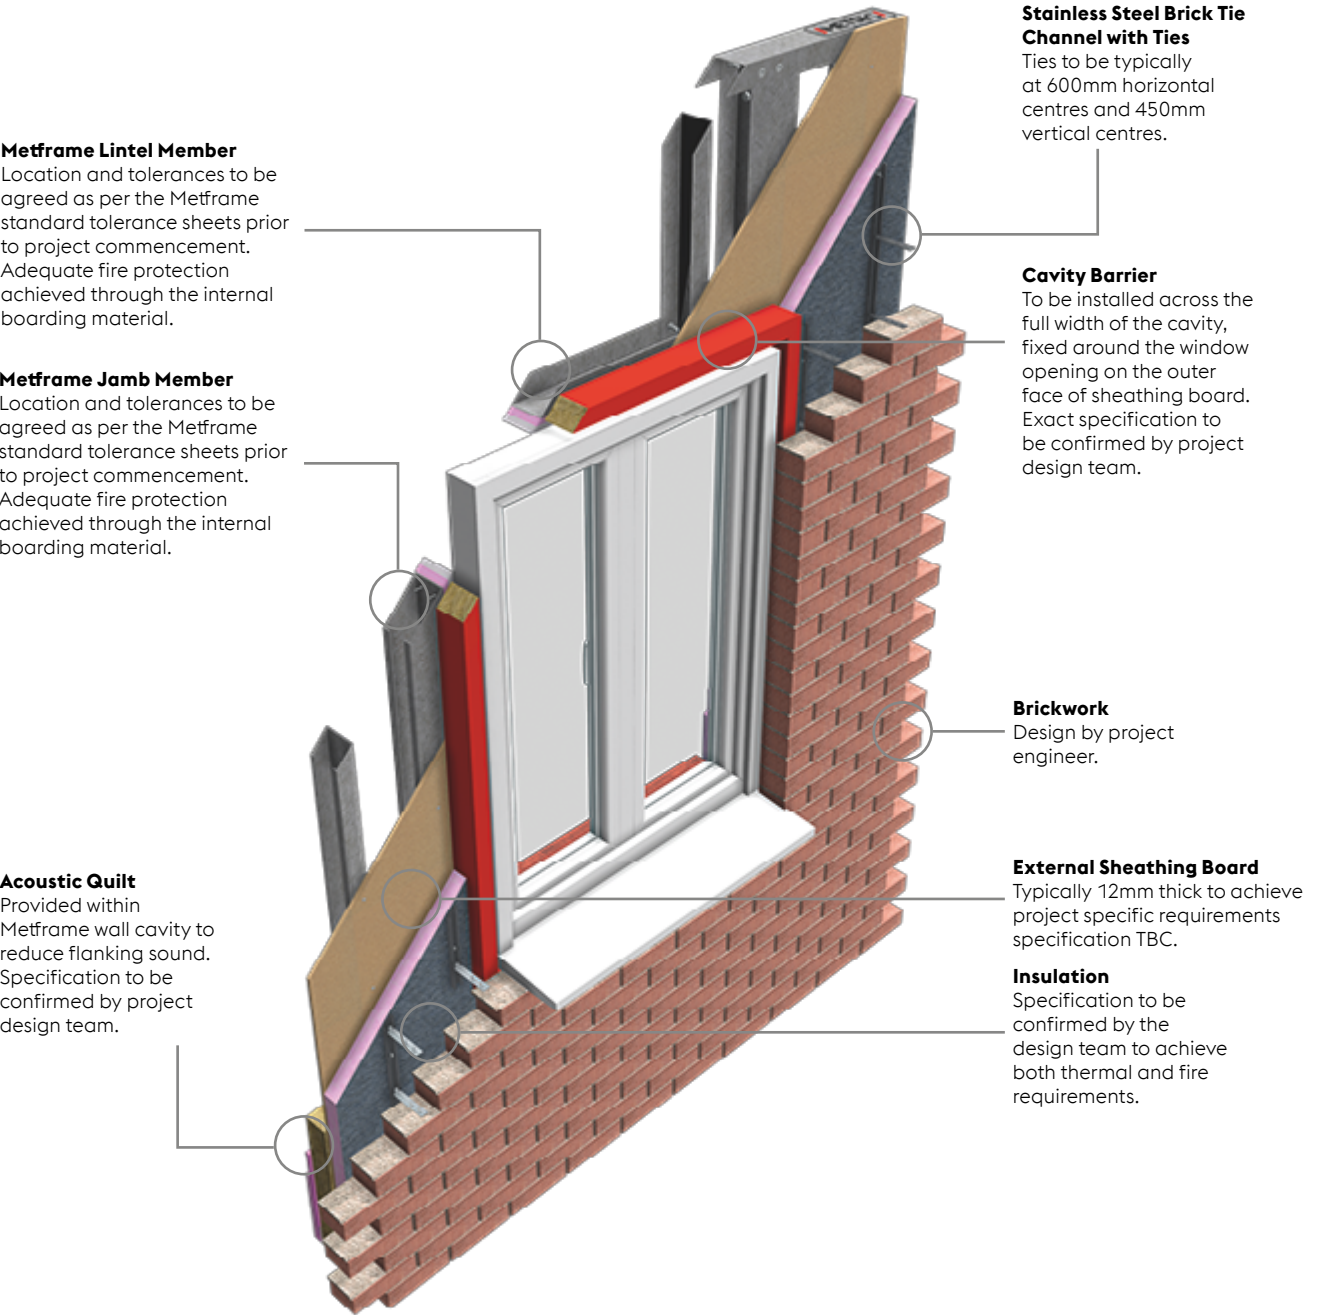




# METFRAME PARTY WALL AND CORRIDOR WALL


Build-ups based on systems that have the capacity to achieve fire and acoustic performance standards.

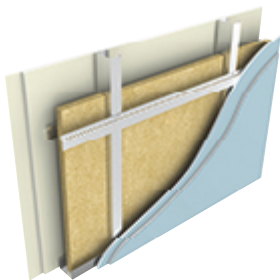

**Option 1**  
2 x 15mm British Gypsum SoundBloc plasterboard each side, single 100mm stud with with Metsec RB565 resilient bar both sides, 1 x ISOVER 50mm APR 1200 quilt to cavity.

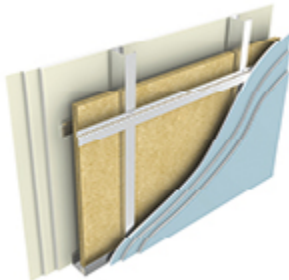


**Option 2**  
3 x 15mm British Gypsum SoundBloc plasterboard each side, single 120mm stud with Metsec RB565 resilient bar both sides, 1 x ISOVER 50mm APR 1200 quilt to cavity.

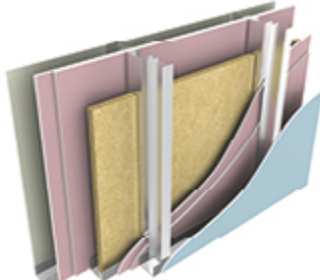


**Option 3**  
British Gypsum 2 x 12.5mm fireline plasterboard each side, single 100mm stud, 1 x ISOVER 50mm APR 1200 quilt to cavity, Metsec PI50mm I stud either side lined with 1 x 15mm British Gypsum soundboard each side. Minimum width 310mm.  
Note: 1 hour Fire Performance comes from 2 x Fireboard alone.

Option	Plasterboard Lining	Overall Width	Minimum Stud Depth	Fire Test Laboratory and Number	Laboratory Acoustic Performance Rw dB (Rw + Ctr)	Acoustic Test Laboratory and Number
Fire Performance from either side <b>60 MINUTES – TO BS EN 1365-1:2012</b>						
1	2x15mm British Gypsum Gyproc Soundbloc	200mm	100mm	BRE P100456-1089	64(56)	BTC 15628A
2	3x15mm British Gypsum Gyproc Soundbloc	230mm	120mm	BRE P100456-1088 <sup>1</sup>	68(63)	BTC 21730A
3	2x12.5mm British Gypsum Gyproc Fireline	310mm	100mm	BRE P100456-1160	66(48)	BTC 21693A

## 90 minute Fire Performance

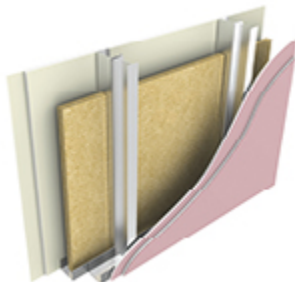


**Option 1**  
2 x 15mm British Gypsum Fireline plasterboard each side, single 100mm stud, 1 x ISOVER 50mm APR 1200 quilt to cavity, Metsec PI50mm I stud.

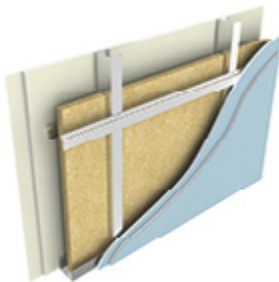


**Option 2**  
2 x 15mm British Gypsum Soundbloc F plasterboard each side, single 100mm stud with Metsec RB505 resilient bar both sides, 1 x ISOVER 50mm APR 1200 quilt to cavity.

Option	Plasterboard Lining	Overall Width	Minimum Stud Depth	Fire Test Laboratory and Number	Laboratory Acoustic Performance Rw dB (Rw + Ctr)	Acoustic Test Laboratory and Number
Fire Performance from either side <b>90 MINUTES – TO BS EN 1365-1:2012</b>						
1	2x15mm British Gypsum Gyproc Fireline	240mm	100mm	BRE P1000456-1123	63(56)	BTC 15628A
2	2x15mm British Gypsum Gyproc Soundbloc F	200mm	100mm	BRE P1000456-1163	64(56)	BTC 21729A <sup>2</sup>

## 120 minute Fire Performance

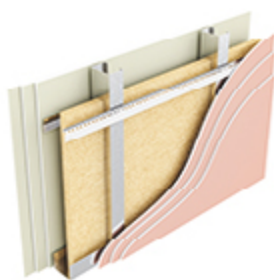

**Option 1**  
3 x 15mm British Gypsum Fireline plasterboard each side on single 120mm stud with Metsec RB565 resilient bar both sides, 1 x ISOVER 50mm APR 1200 quilt to cavity.

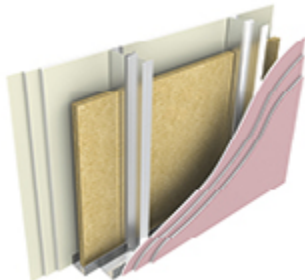



**Option 2**  
3 x 15mm British Gypsum Fireline plasterboard each side on single 100mm stud, 1 x ISOVER 50mm APR 1200 quilt to cavity, Metsec PI50mm I stud.

Option	Plasterboard Lining	Overall Width	Minimum Stud Depth	Fire Test Laboratory and Number	Laboratory Acoustic Performance Rw dB (Rw + Ctr)	Acoustic Test Laboratory and Number
Fire Performance from either side <b>120 MINUTES – TO BS EN 1365-1:2012</b>						
1	3x15mm British Gypsum Gyproc Fireline	250mm	120mm	BRE P1000456-1129	66(61)	BTC 21728A
2	3x15mm British Gypsum Gyproc Fireline	270mm	100mm	BRE P1000456-1172	68(61)	BTC 21688A

**Note:** All laboratory acoustic tests carried out in accordance with BS EN ISO 10140-2:2010 and BS EN ISO 140-3:1995  
1. Assessed performance based on additional layer of 15mm British Gypsum Gyproc Soundbloc added to each face.  
2. Estimated performance based on laboratory test BTC 21729A carried out with British Gypsum Gyproc Soundbloc.





# DETAIL MF005 INTERNAL PARTY WALL WITH CONCRETE FLOOR

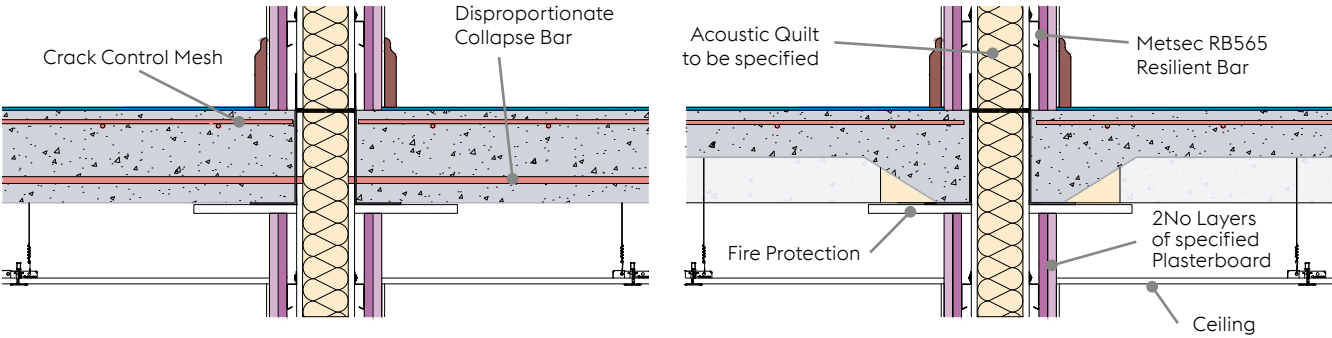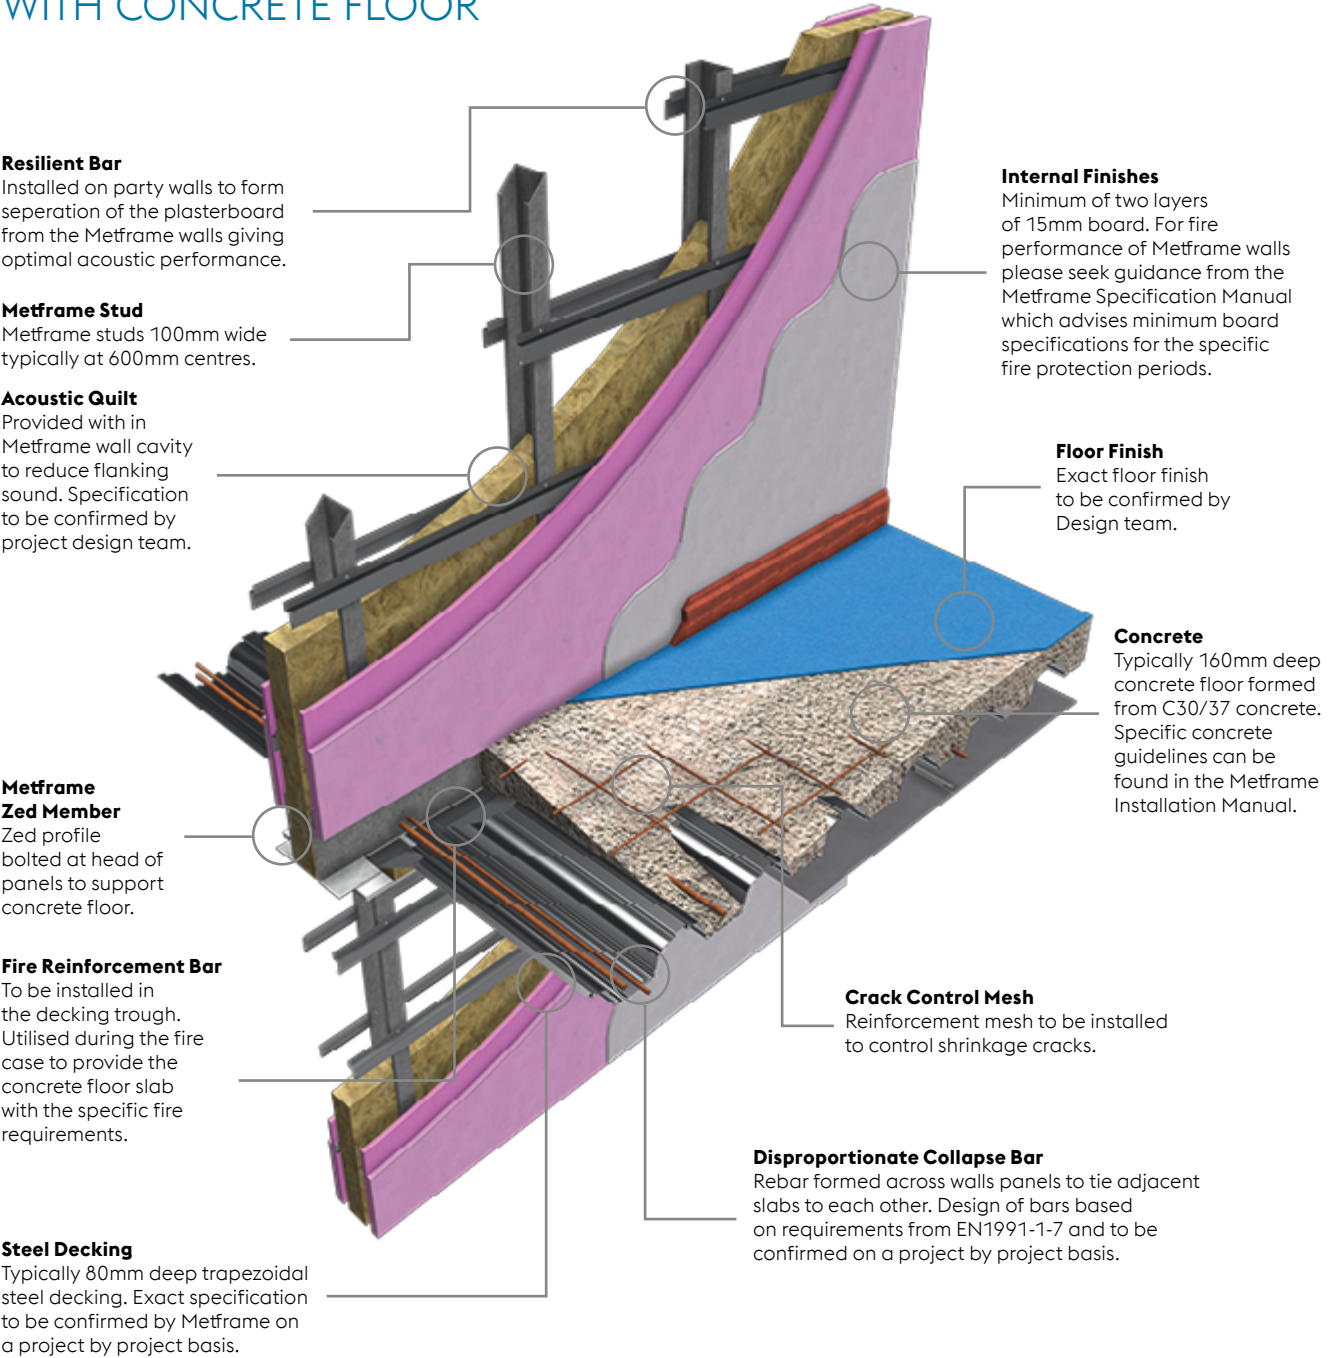

Section at Floor Level with Reinforcement

Section at Floor Level

# DETAIL MF005 INTERNAL PARTY WALL WITH CONCRETE FLOOR VIEWED FROM UNDERNEATH

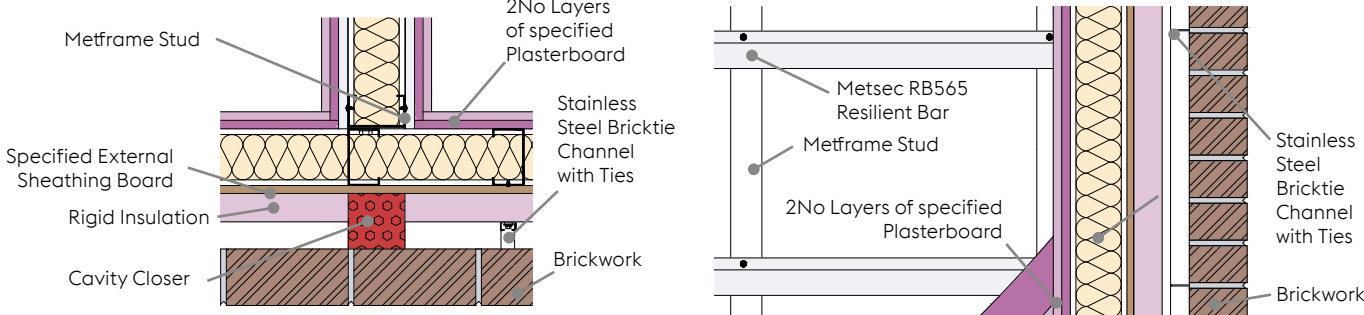
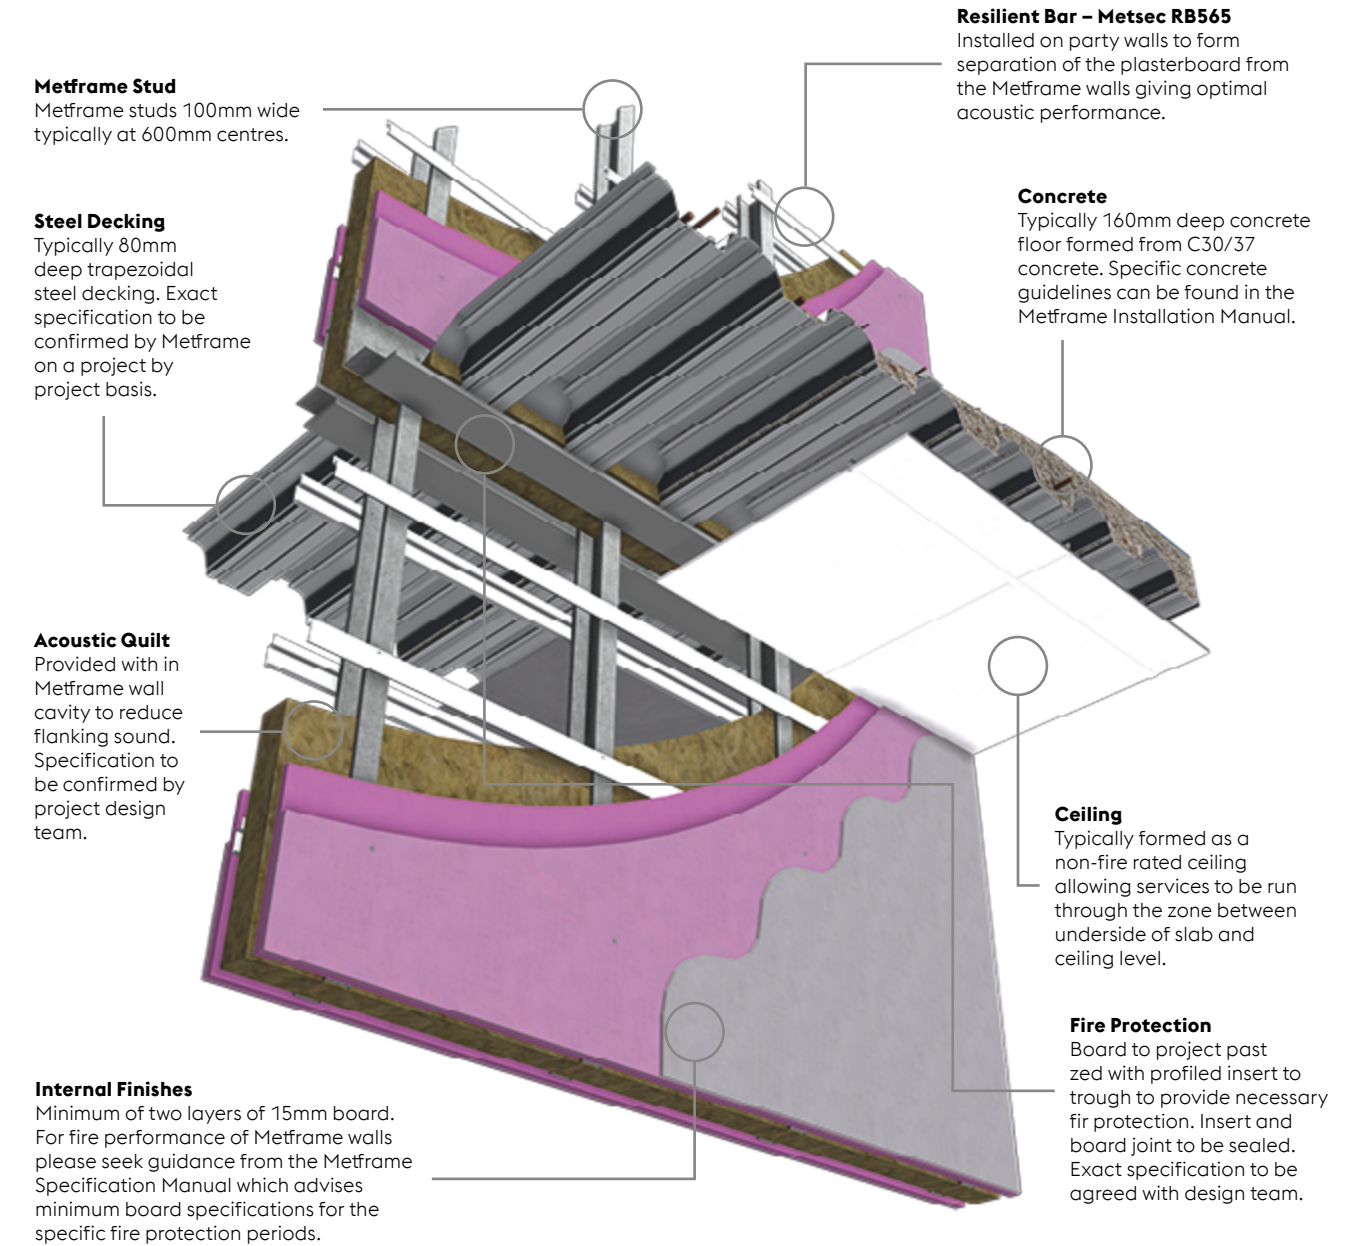


Plan at Junction


Elevation on Resilient Bar



# DETAIL MF021 INTERNAL PARTY WALL WITH JOISTED FLOOR (View 1)

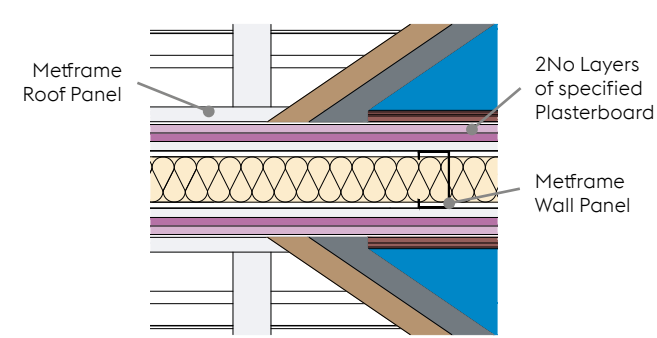
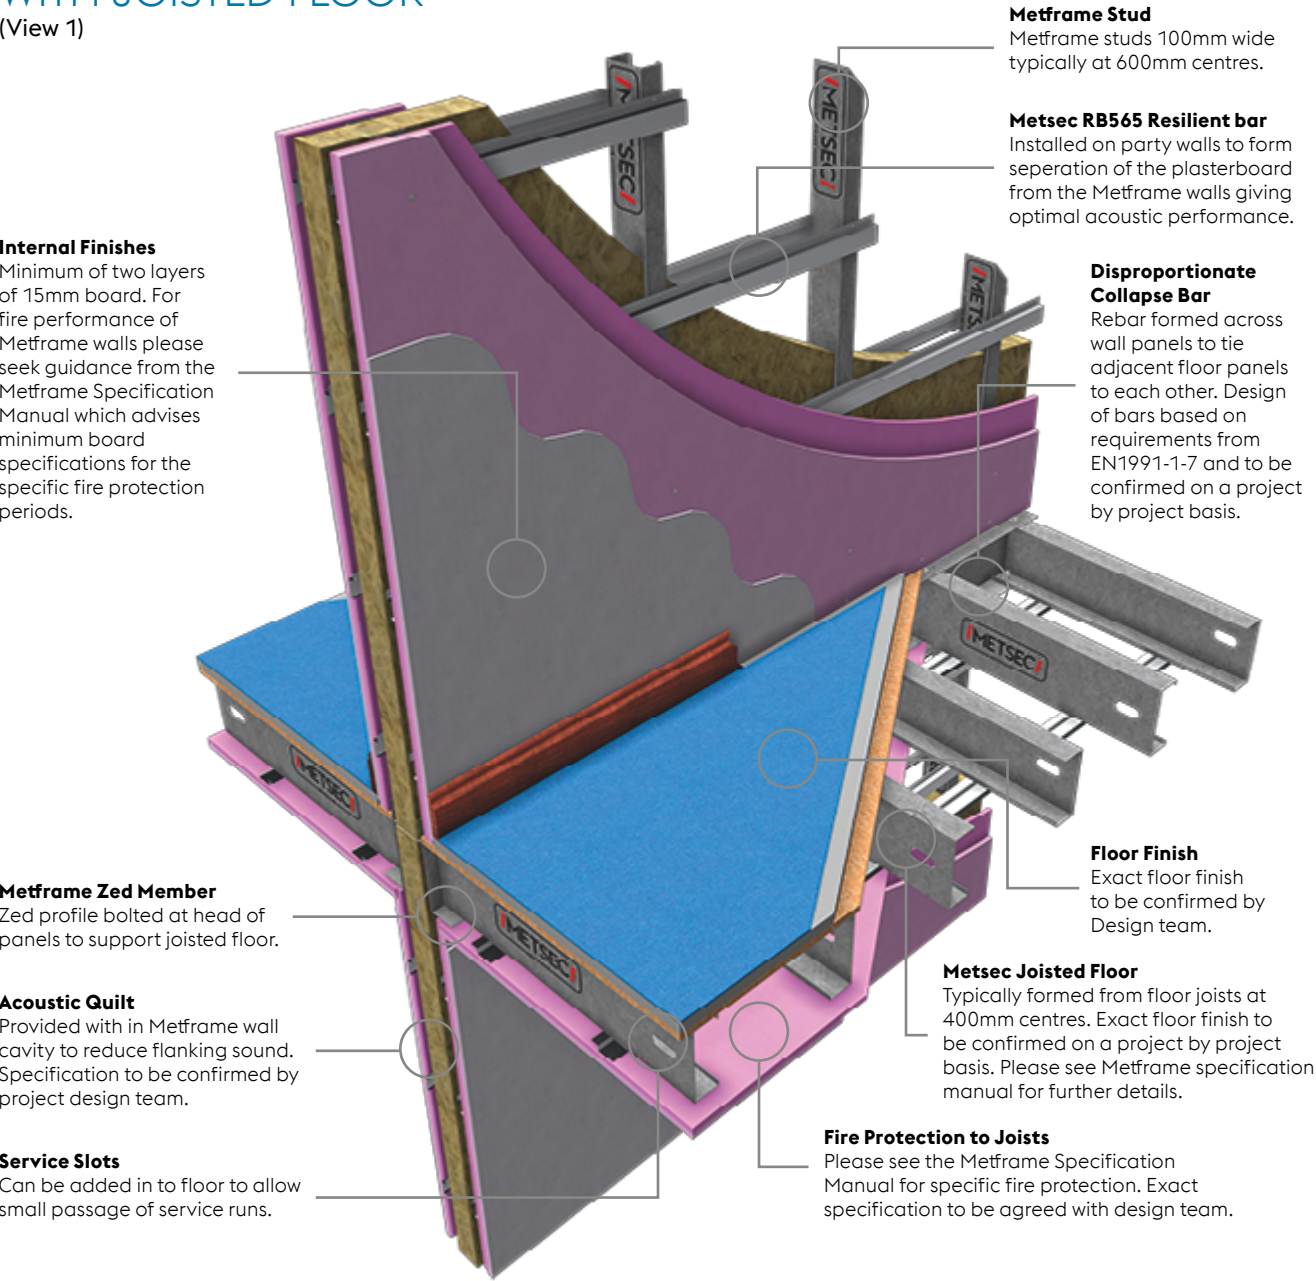


Section at Floor Level

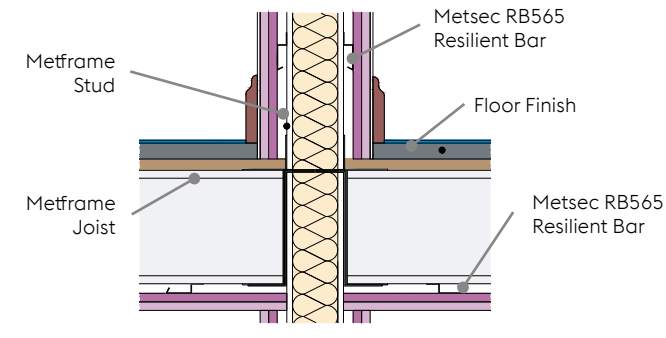

Section at Floor Level

# DETAIL MF020 EXTERNAL WALL WITH JOISTED FLOOR AND BRICKWORK (Viewed internally)

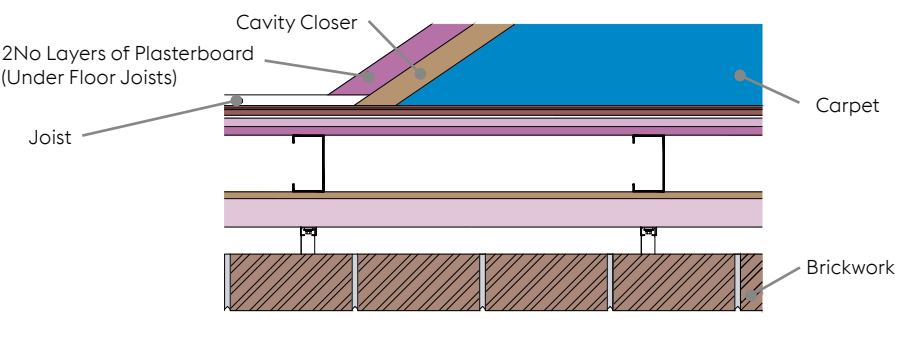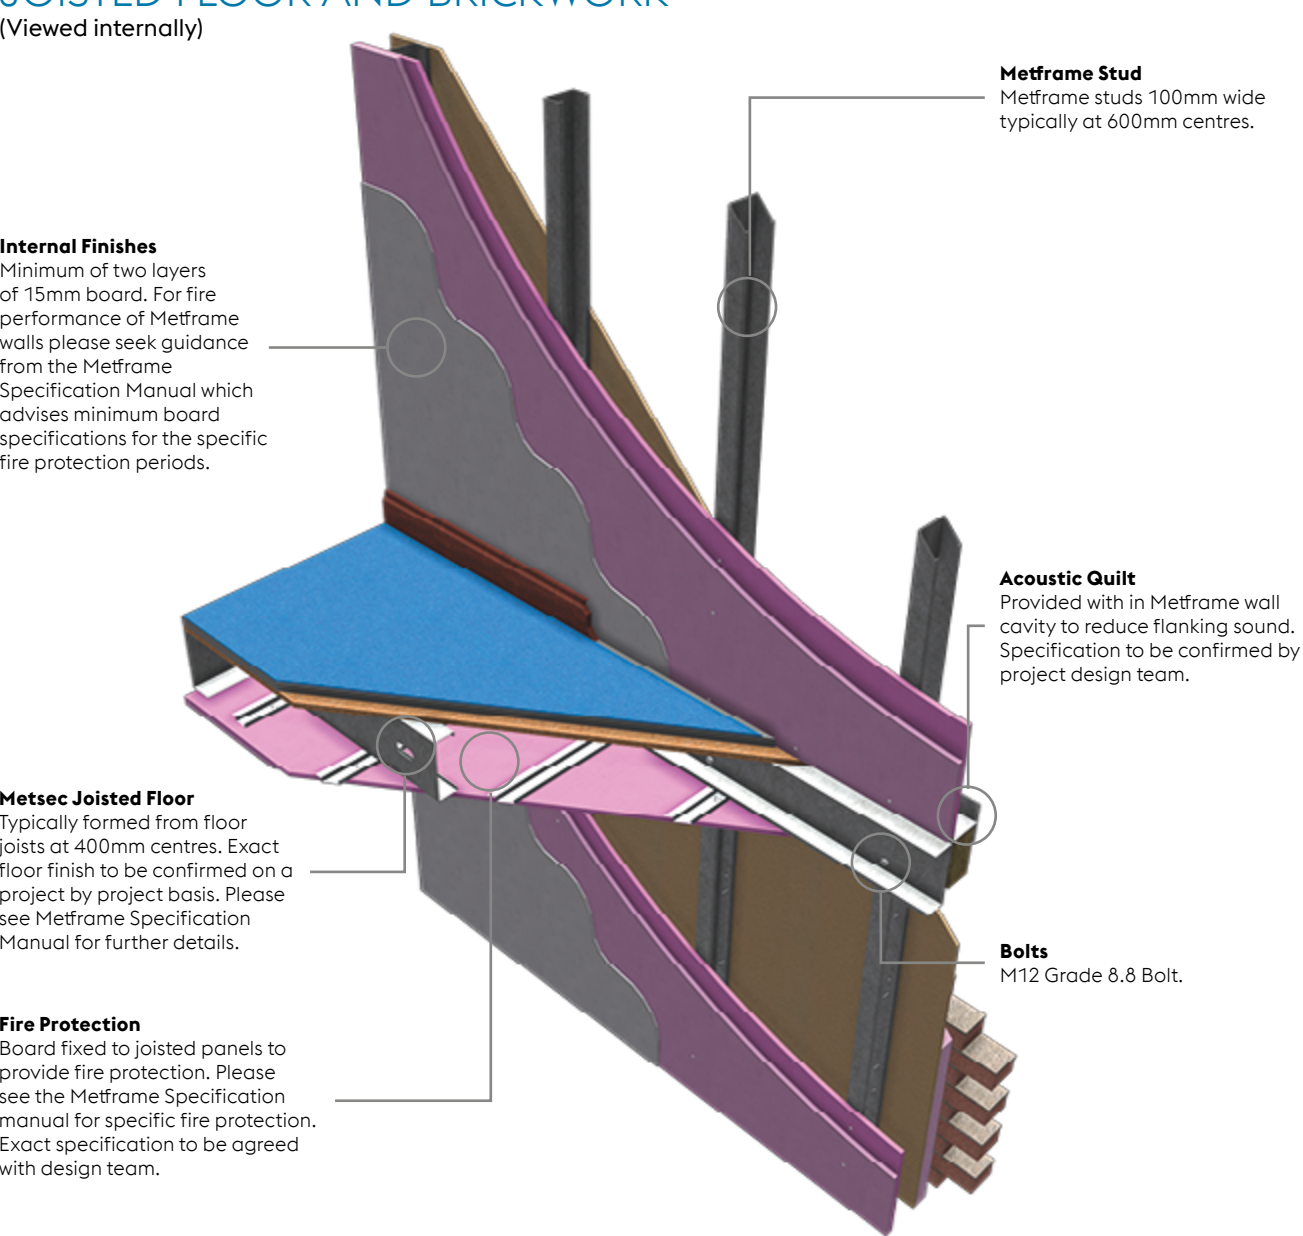

Plan in Floor Build Up




# METFRAME


## INTERNAL WALL

Build-ups based on systems that have the capacity to achieve fire and acoustic performance standards.

### 60 minute Fire Performance

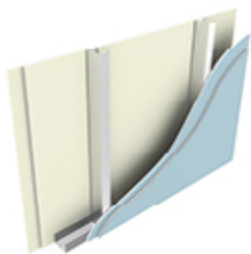


**Option 1**  
2 x 15mm British Gypsum SoundBloc soundboard plasterboard each side, single 100mm stud. O/A width 160mm.

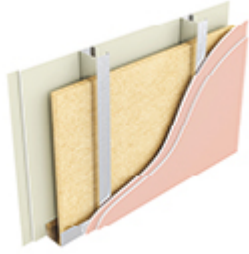


**Option 2**  
2 x 12.5mm British Gypsum Fireline plasterboard each side, single 100mm stud, 1 x ISOVER 50mm APR 1200 quilt to cavity. O/A width 150mm.

### 90 minute Fire Performance

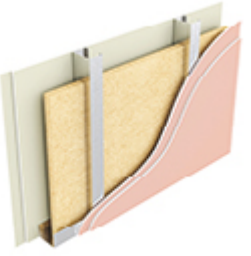

**Option 3**  
2 x 15mm British Gypsum Fireline plasterboard each side, single 100mm stud, 1 x ISOVER 50mm APR 1200 quilt to cavity. O/A width 160mm.

### 120 minute Fire Performance


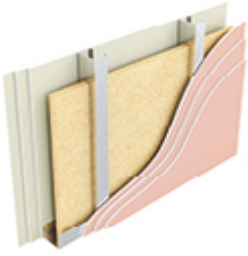


**Option 4**  
3 x 15mm British Gypsum Fireline plasterboard each side, single 100mm stud, 1 x ISOVER 50mm APR 1200 quilt to cavity. O/A width 190mm.

Option	Plasterboard Lining	Overall Width	Minimum Stud Depth	Fire Test Laboratory and Number	Laboratory Acoustic Performance Rw dB	Acoustic Test Laboratory and Number
Fire Performance from either side <b>60 MINUTES – TO BS EN 1365-1:2012</b>						
1	2x15mm British Gypsum Gyproc Soundbloc	160mm	100mm	BRE P100456-1088	54	BTC 20864A
2	2x12.5mm British Gypsum Gyproc Fireline	150mm	100mm	BRE P100456-1160	50	BTC 21691A
Fire Performance from either side <b>90 MINUTES – TO BS EN 1365-1:2012</b>						
3	2x15mm British Gypsum Gyproc Fireline	160mm	100mm	P100456-1198	52	CALCULATED <sup>1</sup>
Fire Performance from either side <b>120 MINUTES – TO BS EN 1365-1:2012</b>						
4	3x15mm British Gypsum Gyproc Fireline	190mm	100mm	P124545-1002	56	CALCULATED <sup>1</sup>

**Note:** All laboratory acoustic tests carried out in accordance with BS EN ISO 10140-2:2010 and BS EN ISO 140-3:1995  
1. Acoustic performance calculated using INSUL software.

## DETAIL MF004 INTERNAL NON-PARTY WALL WITH CONCRETE FLOOR

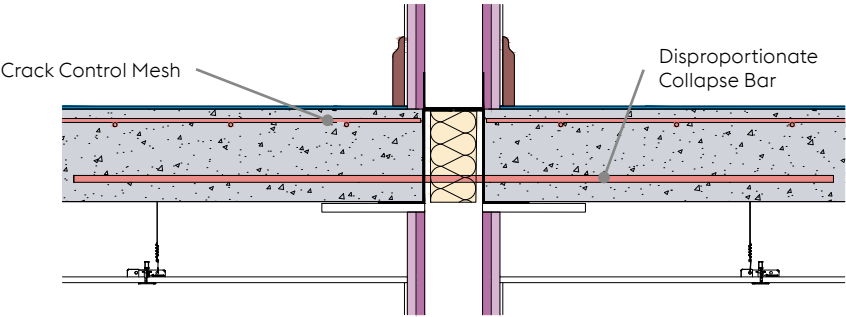
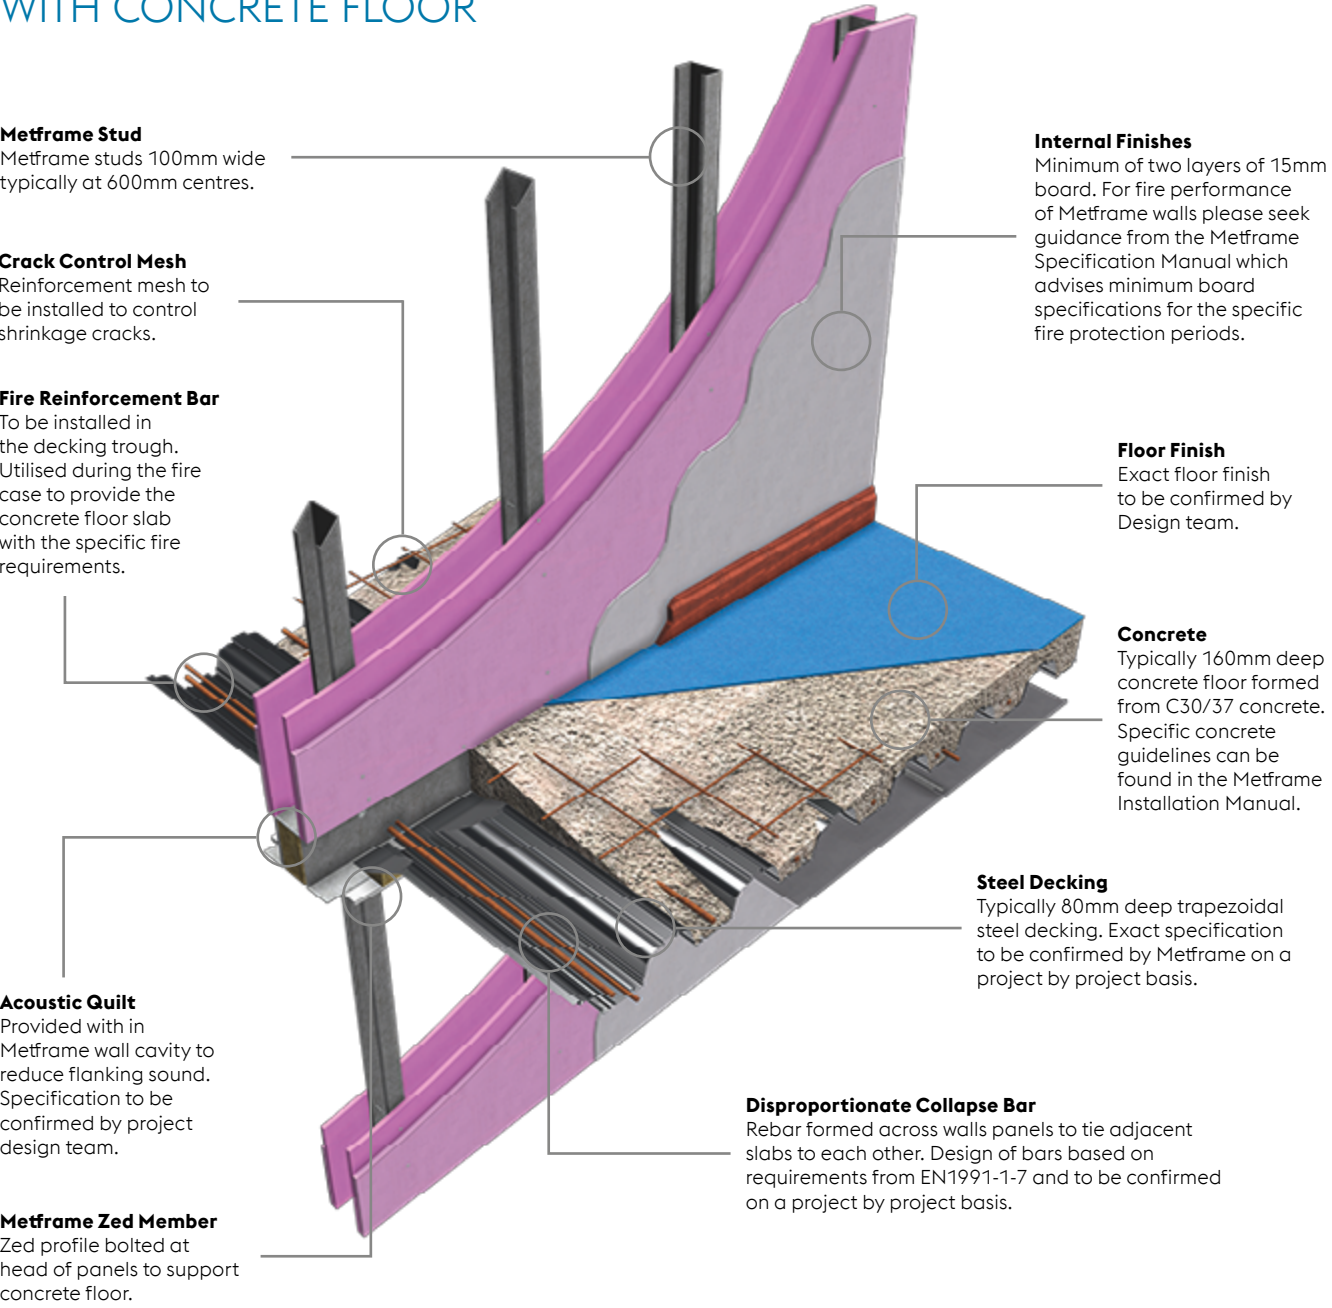


Section at Floor Level with Reinforcement







# DETAIL MF004 INTERNAL NON-PARTY WALL WITH CONCRETE FLOOR (Viewed from underneath)

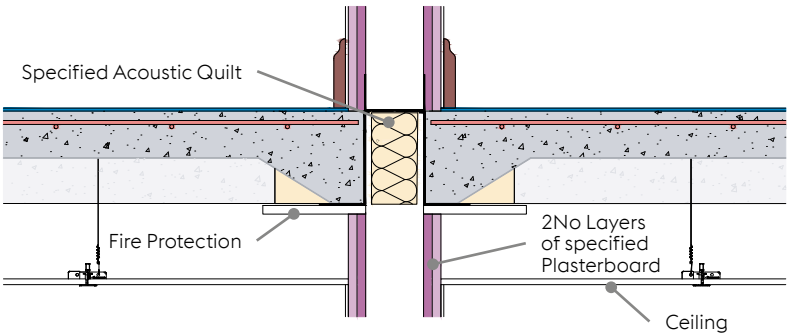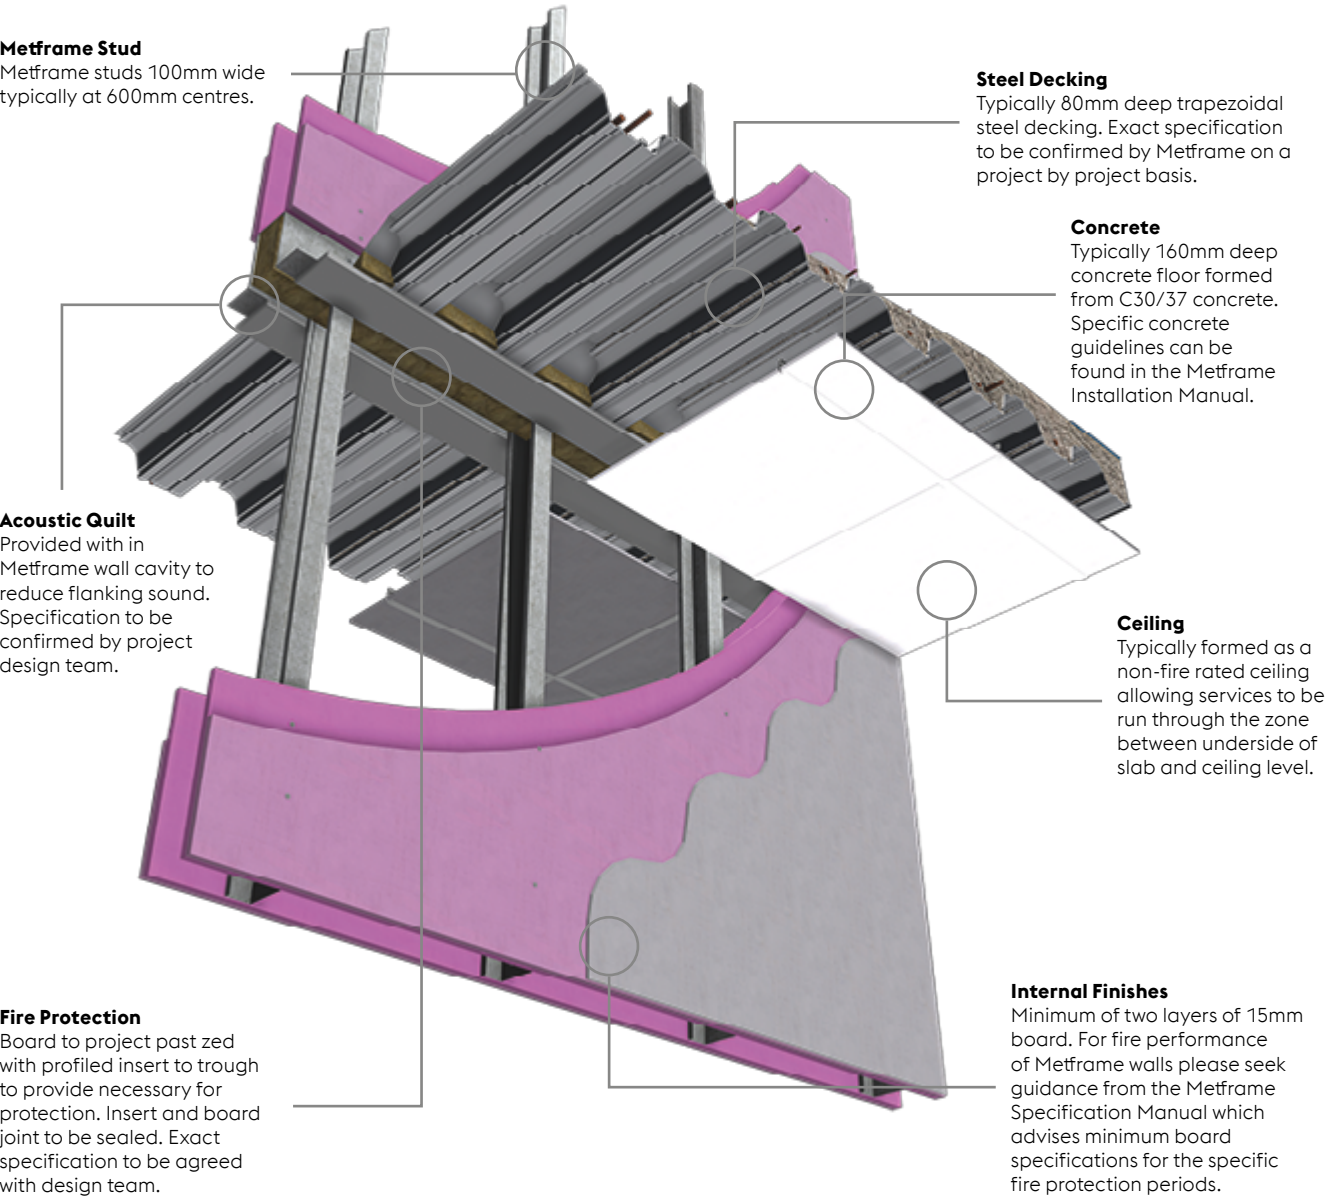


Section at Floor Level

# DETAIL MF002 DOOR DETAIL IN AN INTERNAL PANEL (View B)

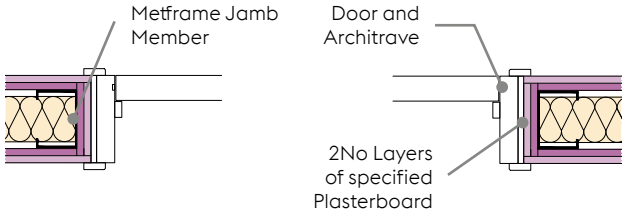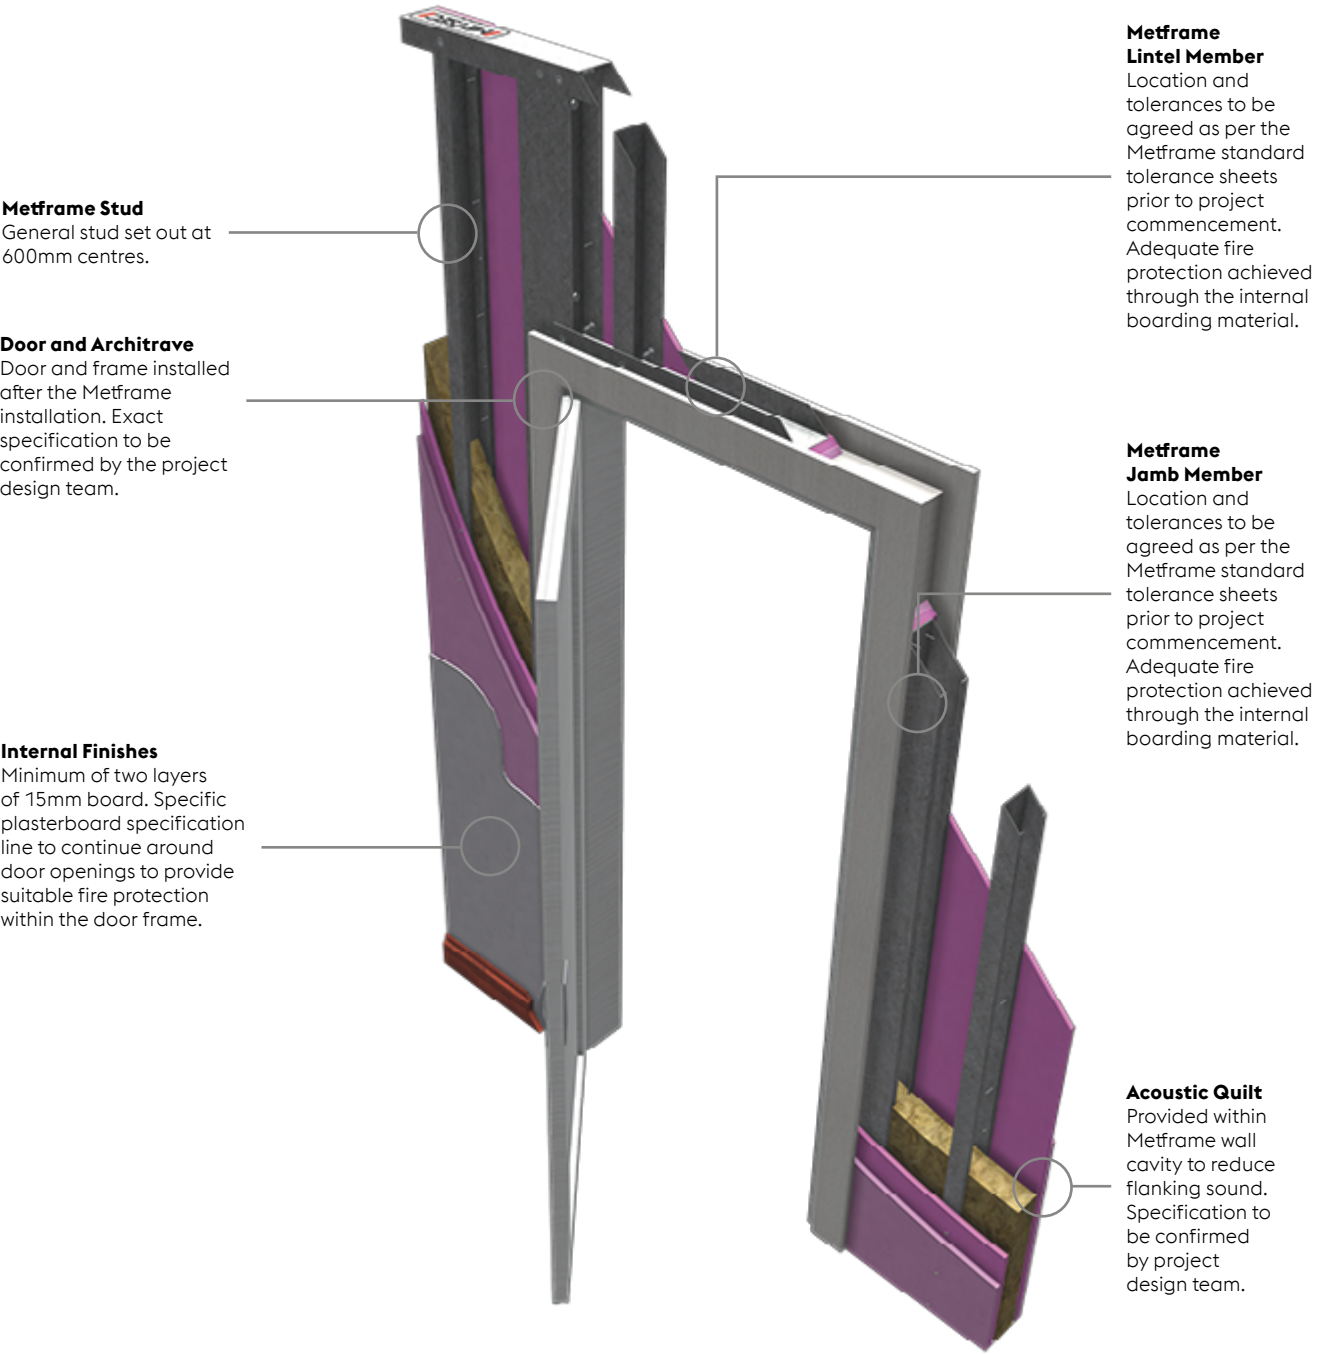

Plan on Metframe Jamb

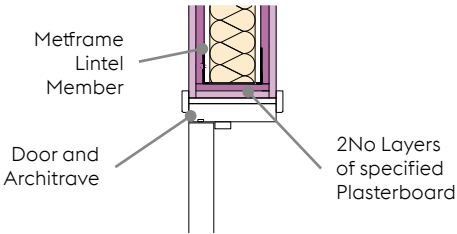

Section on Metframe Lintel




# METFRAME

## INTERNAL FLOORS

Build-ups based on systems that have the capacity to achieve fire and acoustic performance standards.



**Option 2**  
Type F5: Three layers of British Gypsum Fireline plasterboard, Metsec RB565 resilient bars, joists with 1 x ISOVER 50mm APR 1200 quilt to cavity, 15mm plywood, 19mm British Gypsum Plank, 8mm Cloud 9 Underlay, 12mm OS

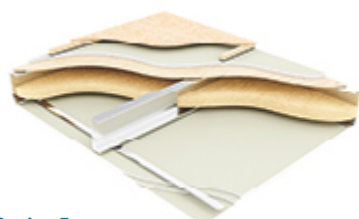


**Option 3**  
Type F9: Three layers of 12.5mm British Gypsum Fireline plasterboard, resilient bars, joists with 1 x ISOVER 50mm APR 1200 quilt to cavity, 15mm plywood, 19mm British Gypsum Plank, 70mm Collecta Deckfon acoustic battens, 18mm V313 chipboard.




**Option 4**  
Type F5: Three layers of 15mm British Gypsum Fireline plasterboard, Metsec RB565 resilient bars, joists with 1 x ISOVER 50mm APR 1200 quilt to cavity, 15mm plywood, 19mm British Gypsum Plank, 8mm Cloud 9 Underlay, 12mm OSB.



**Option 5**  
Type F9: Three layers of 15mm British Gypsum Fireline plasterboard, Metsec RB565 resilient bars, joists with 1 x ISOVER 50mm APR 1200 quilt to cavity, 15mm plywood, 19mm British Gypsum Plank, 70mm Collecta Deckfon acoustic battens, 18mm V313 chipboard.

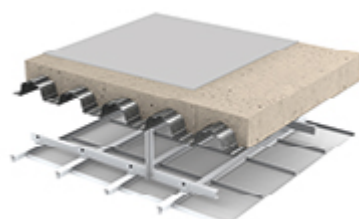

**Option 6**  
Minimum 160mm deep concrete slab (80mm minimum), 5mm Collecta Rubberform, MF ceiling with 1 x 15mm British Gypsum Soundbloc.

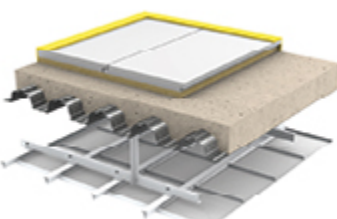


**Option 7 (Scotland)**  
Minimum 160mm deep concrete slab (80mm minimum), Collecta Screedboard 30, Metsec MF ceiling with 1 x 15mm British Gypsum Soundbloc.


Option	Plasterboard Lining	Overall Depth	Minimum Joist Depth	Fire Test Laboratory and Number	Laboratory Acoustic Performance Rw dB (Rw & Ctr)	Laboratory Acoustic Performance Ln,w	Acoustic Test Laboratory and Number
Fire Performance from Underside <b>60 MINUTES – TO BS EN 1365-2:2014</b>							
1	2x12.5mm British Gypsum Gyproc Fireline	300mm	200mm	BRE P100456-1105	63(54)	55	BRE 217158
Fire Performance from Underside <b>90 MINUTES – TO BS EN 1365-2:2014</b>							
2	3x12.5mm British Gypsum Gyproc Fireline	240mm	200mm	BRE P100456-1055	63(54)	55	BRE 217158 <sup>1</sup>
3	3x12.5mm British Gypsum Gyproc Fireline	200mm	200mm	BRE P100456-1055	62 (52)	51	BRE 214610 <sup>2</sup>
Fire Performance from Underside <b>120 MINUTES – TO BS EN 1365-2:2014</b>							
4	3x15mm British Gypsum Gyproc Fireline	250mm	200mm	BRE P100456-1081	63 (54)	55	BRE 217158 <sup>3</sup>
5	3x15mm British Gypsum Gyproc Fireline	270mm	200mm	BRE P100456-1081	62 (52)	51	BRE 214610 <sup>4</sup>
6	1x15mm British Gypsum Gyproc Soundbloc	330mm Minimum	-	Refer to Decking Manufacturers Guidance	-	-	Contact Metsec for Acoustic Performance
7	1x15mm British Gypsum Gyproc Soundbloc	300mm Minimum	-	Refer to Decking Manufacturers Guidance	-	-	Contact Metsec for Acoustic Performance

**Note:** All laboratory acoustic tests carried out in accordance with BS EN ISO 140-3:1995 and BS EN ISO 140-6:1998  
1. Estimated performance based on laboratory test BRE 217158 with additional 12.5mm BG Fireline  
2. Estimated performance based on laboratory test BRE 214610 with additional 12.5mm BG Fireline  
3. Estimated performance based on laboratory test BRE 217158 with additional 15.0mm BG Fireline  
4. Estimated performance based on laboratory test BRE 214610 with additional 15.0mm BG Fireline


## CONCRETE FLOORS

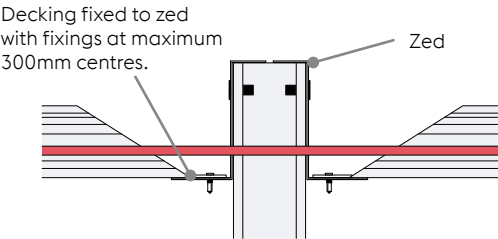

**Deck to Zed Detail MF501C**

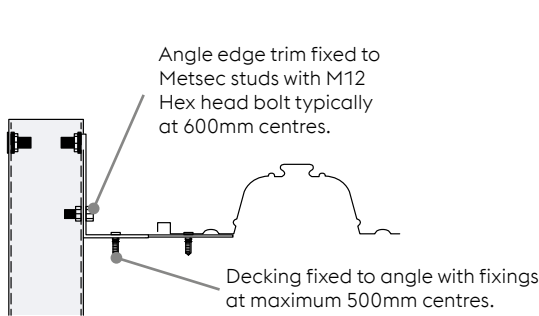

**Fixing Edge of Decking to Metsec Wall MF501A**

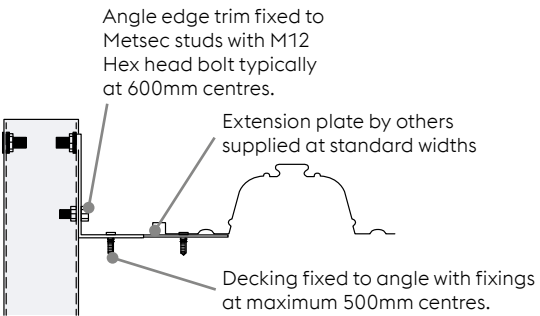

**Extension Plate to Shutter Detail MF501B**





# METFRAME ROOFS

## DETAIL MF014 METFRAME JOISTED ROOF AND EXTERNAL WALL WITH BRICKWORK AND RAINSCREEN FINISHES (Viewed internally)


**Boarding to Metframe Roof Panels**  
Boarded out to provide substrate to finishes and provide a temporary working platform for access during construction. Exact specification of roof build-up to be confirmed by the project design team.

**Angle Support**  
Temporary angle installed to support roof panel during erection. Can be removed after installation of the roof panels is complete.


**Ceiling**  
Typically formed as a non-fire rated ceiling allowing services to be run through within the zone between the underside of the roof joists and the ceiling level. If the roof is utilised as a means of escape fire protection to the underside of the joists will be required as per the specific project building fire requirements.

**Disproportionate Collapse Bar**  
Rebar formed across wall panels to tie adjacent roof panels to each other. Design of bars based on requirements from EN1991-1-7 and to be confirmed on a project by project basis.

**Internal Finishes**  
Minimum of two layers of 15mm board. For fire performance of Metframe walls please seek guidance from the Metframe Specification Manual which advises minimum board specifications for the specific fire protection periods.

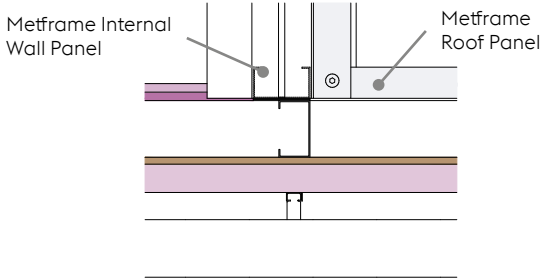

Plan on Internal Wall

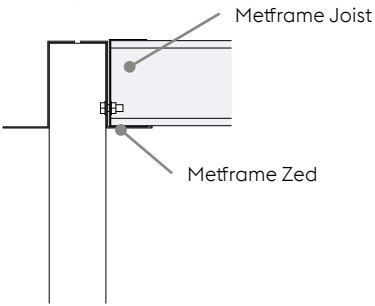

Section at Internal Wall

## DETAIL MF014 METFRAME JOISTED ROOF AND EXTERNAL WALL WITH BRICKWORK AND RAINSCREEN FINISHES (Viewed externally)

**Metframe Roof Joists**  
Formed at 600mm centres. Typically formed either flat with any falls formed with in insulation layer or 1:60 slope minimum. Greater roof slopes can be incorporated to match the project specific specifications if required.


**Metframe Stud**  
Metframe studs 100mm wide typically at 600mm centres.

**Insulation**  
Specification to be confirmed by the design team to achieve both thermal and fire requirements.


**Stainless Steel Brick Tie Channel with Ties**  
Ties to be typically at 600mm horizontal centres and 450mm vertical centres.

**Horizontal Rail**  
Fixed back to vertical rail system. Exact specification to be confirmed by design team.

**Rainscreen Cladding**  
Exact product to be confirmed on a project by project basis by the design team.

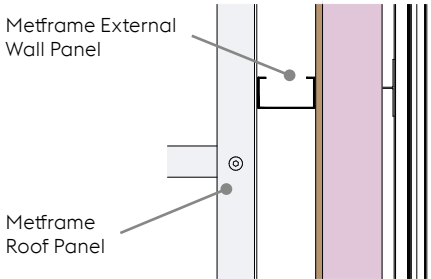


Plan on External Wall

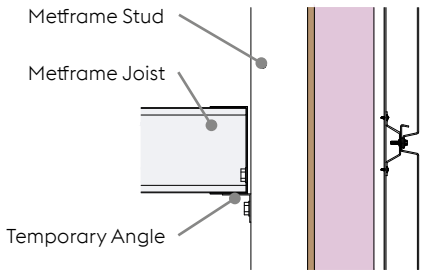


Section at External Wall






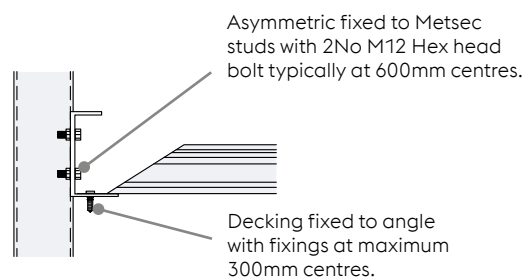


Decking fixed to Asymmetric on Metsec Wall MF508A

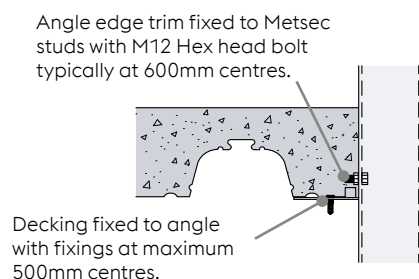


Fixing Edge of Decking to Metsec Wall MF508B

DETAIL MF015  
TIMBER TRUSS ROOF DETAIL  
(Viewed externally)

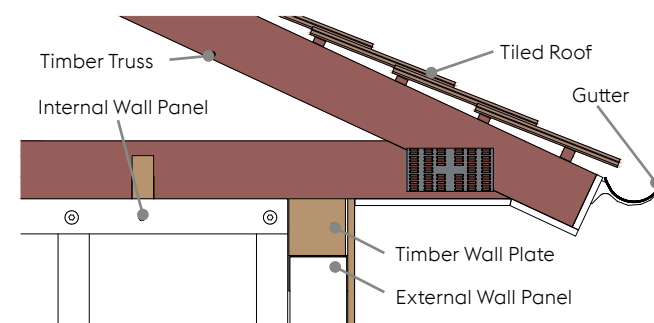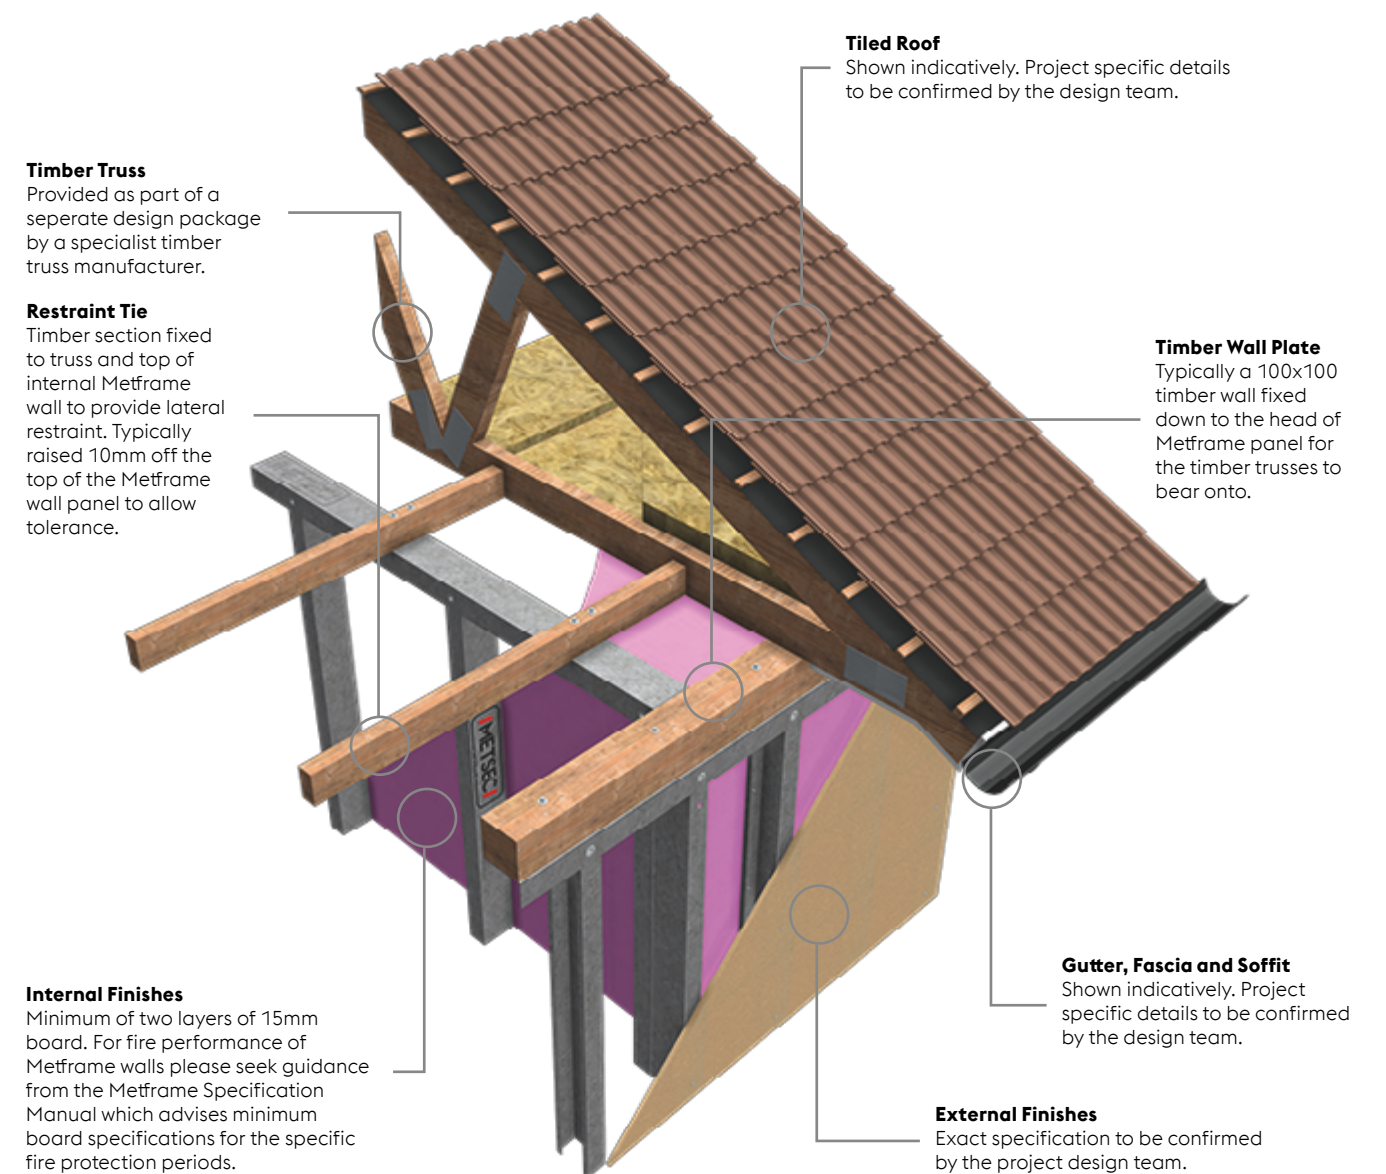

Section through External Wall

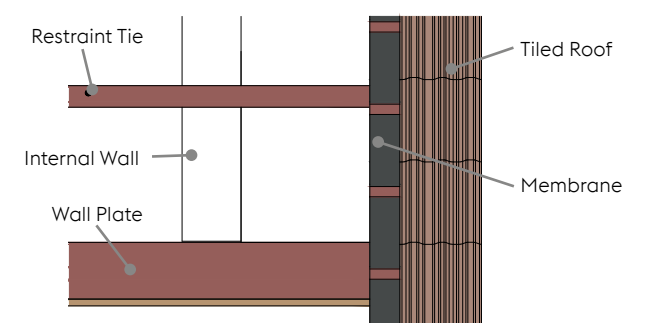


Plan on Internal Wall






# METFRAME STAIRWELLS

## DETAIL MF018 STAIRWELL WITH A CONCRETE HALF LANDING (3D view)

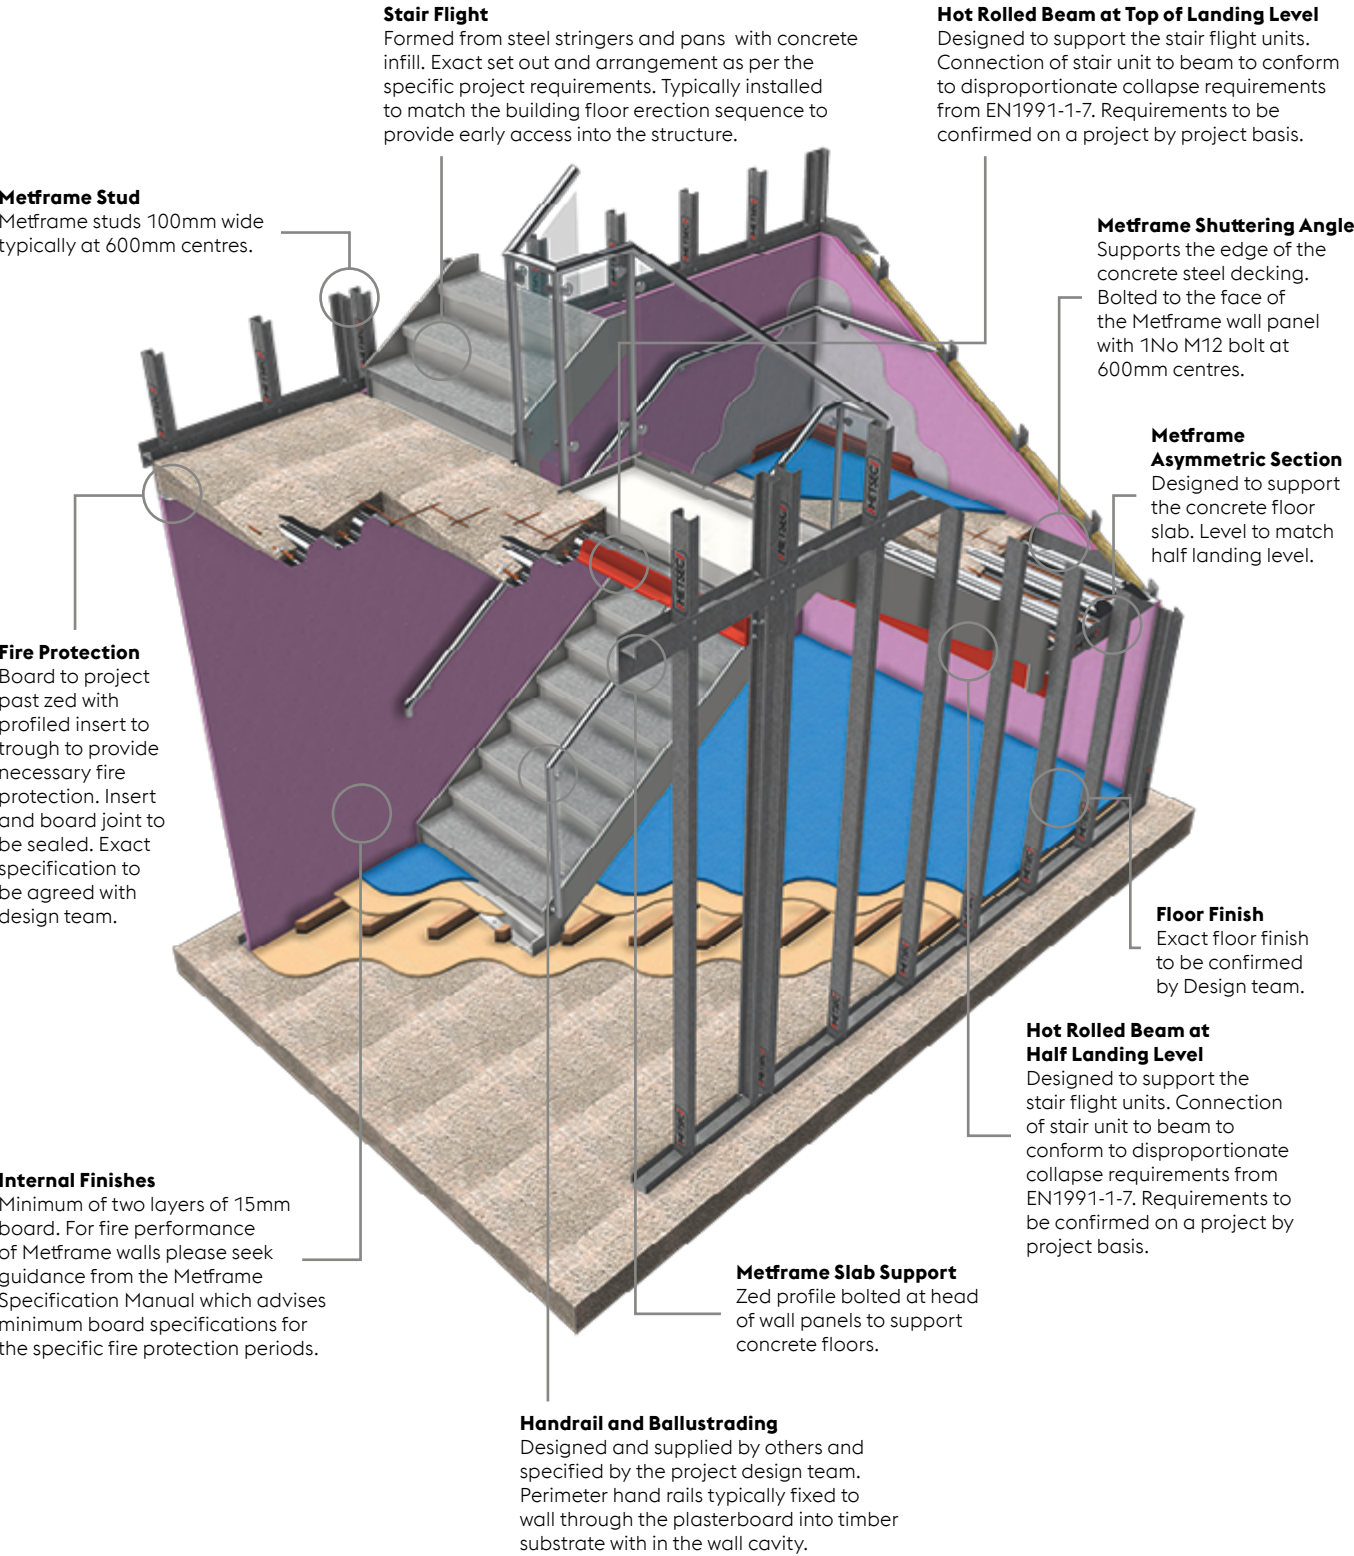



## DETAIL MF018 STAIRWELL WITH A CONCRETE HALF LANDING (Sectional details)

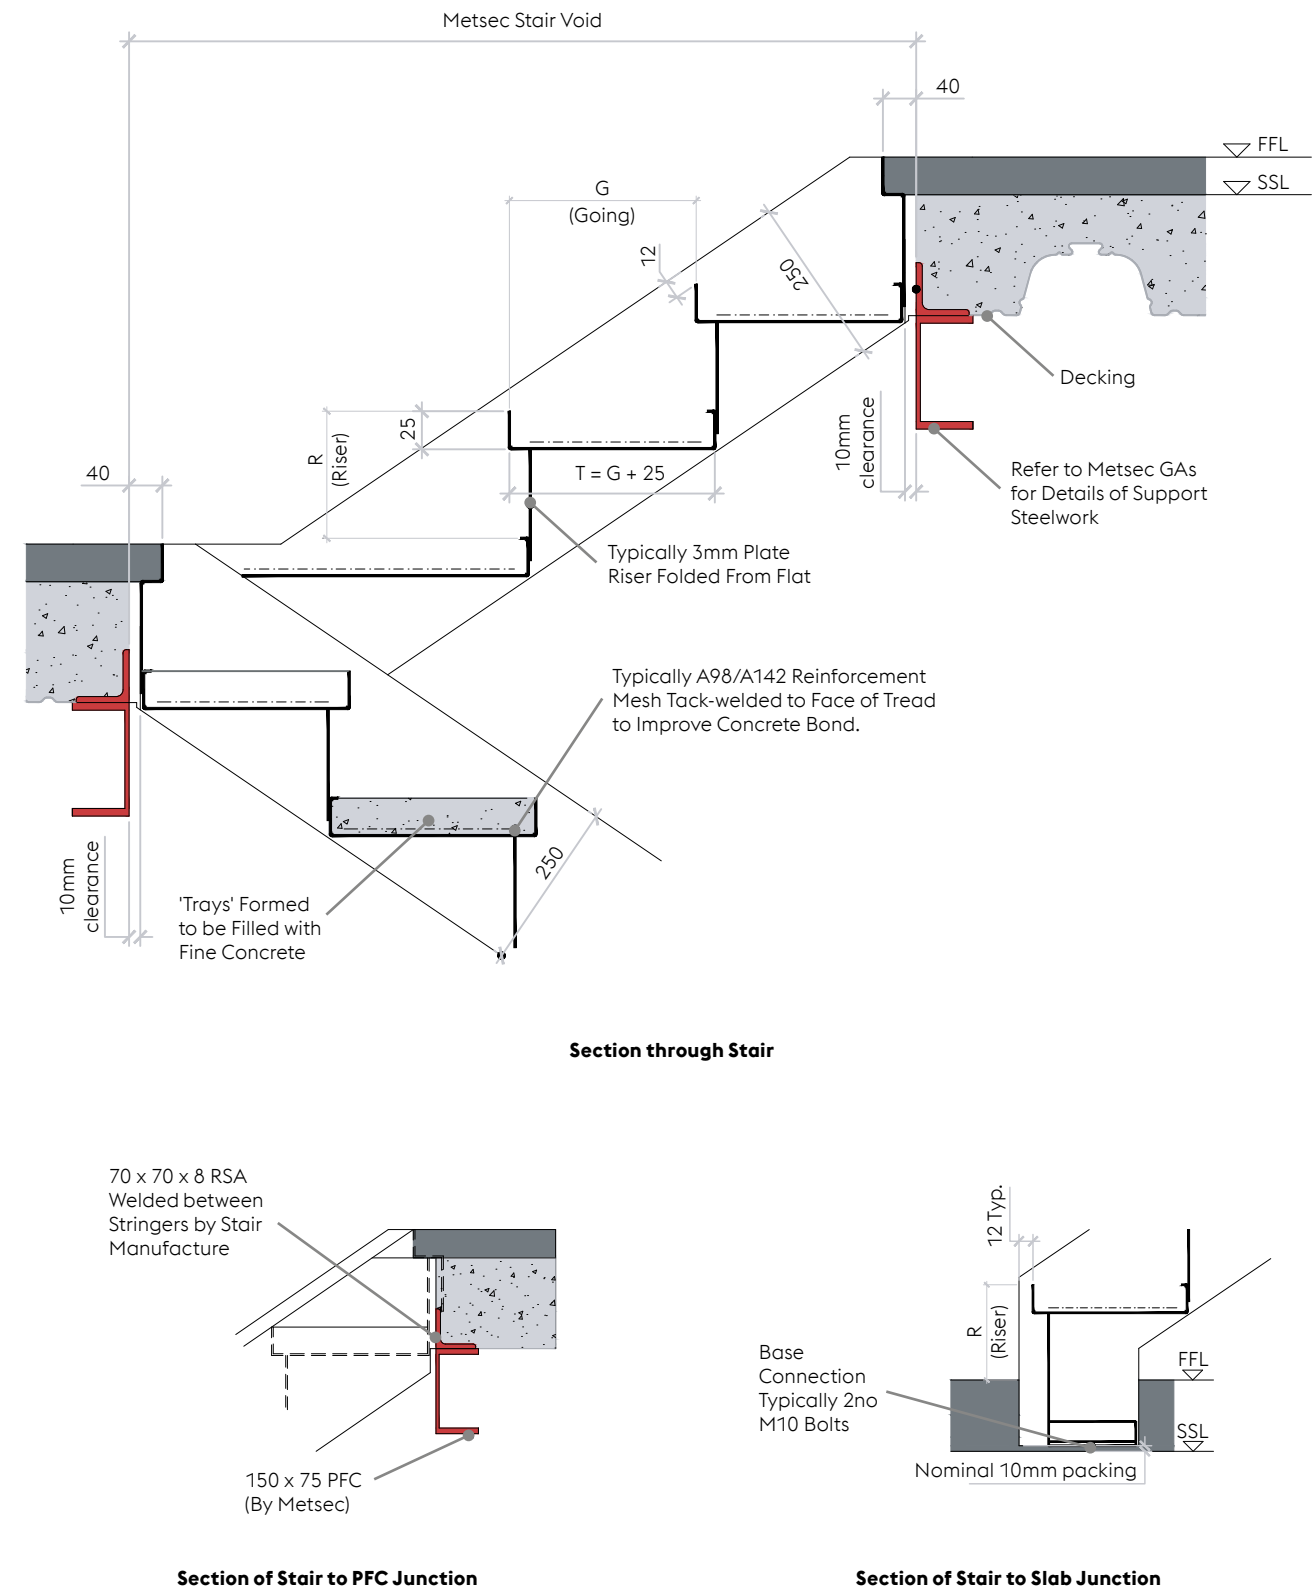




# METFRAME LIFT SHAFTS

## DETAIL MF016 LIFT PIT BASE DETAIL (3D view)

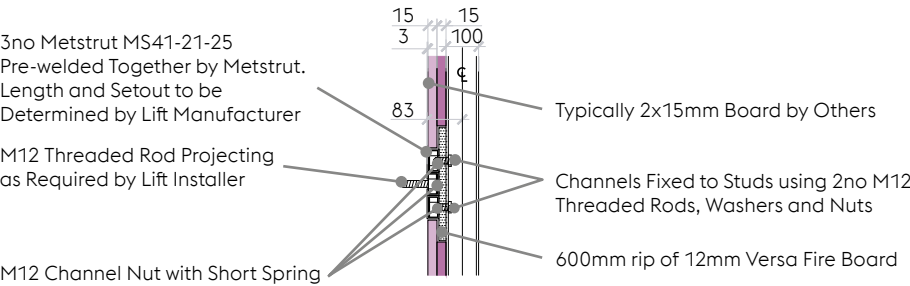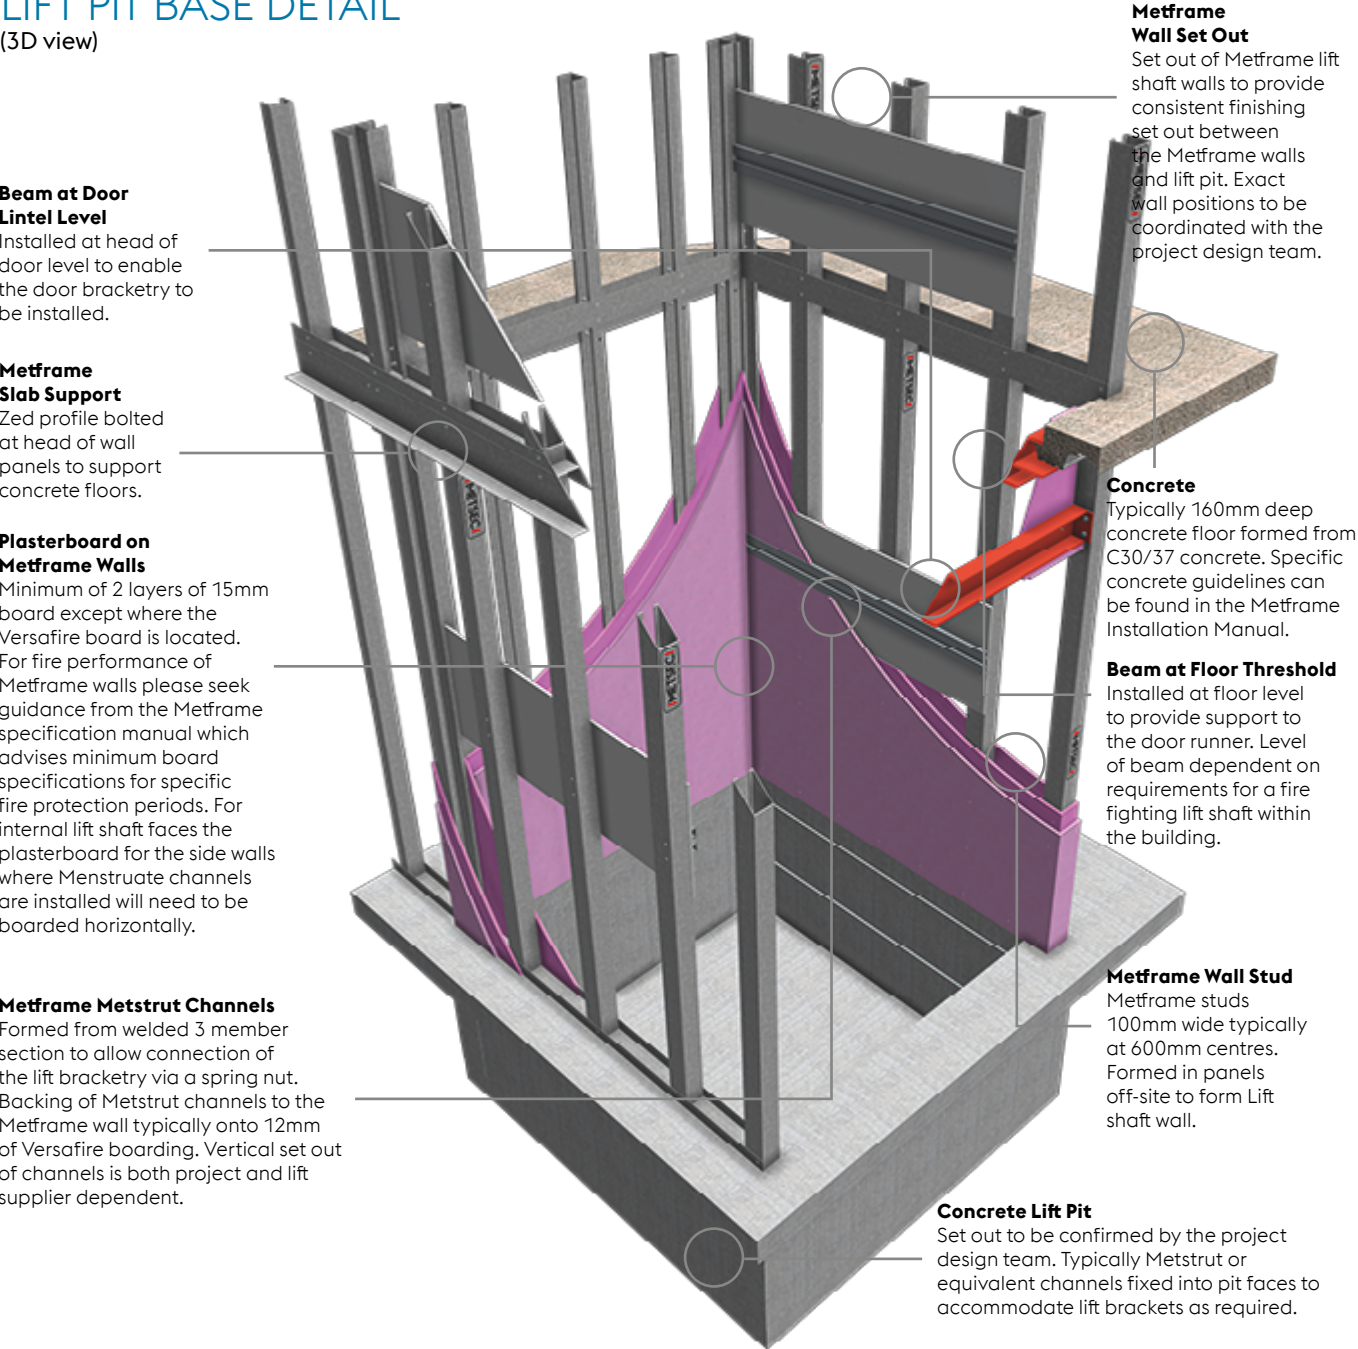


Lift Channel Fixing Detail

## DETAIL MF017 LIFT SHAFT WITH DOOR AND CAP DETAIL (3D view)

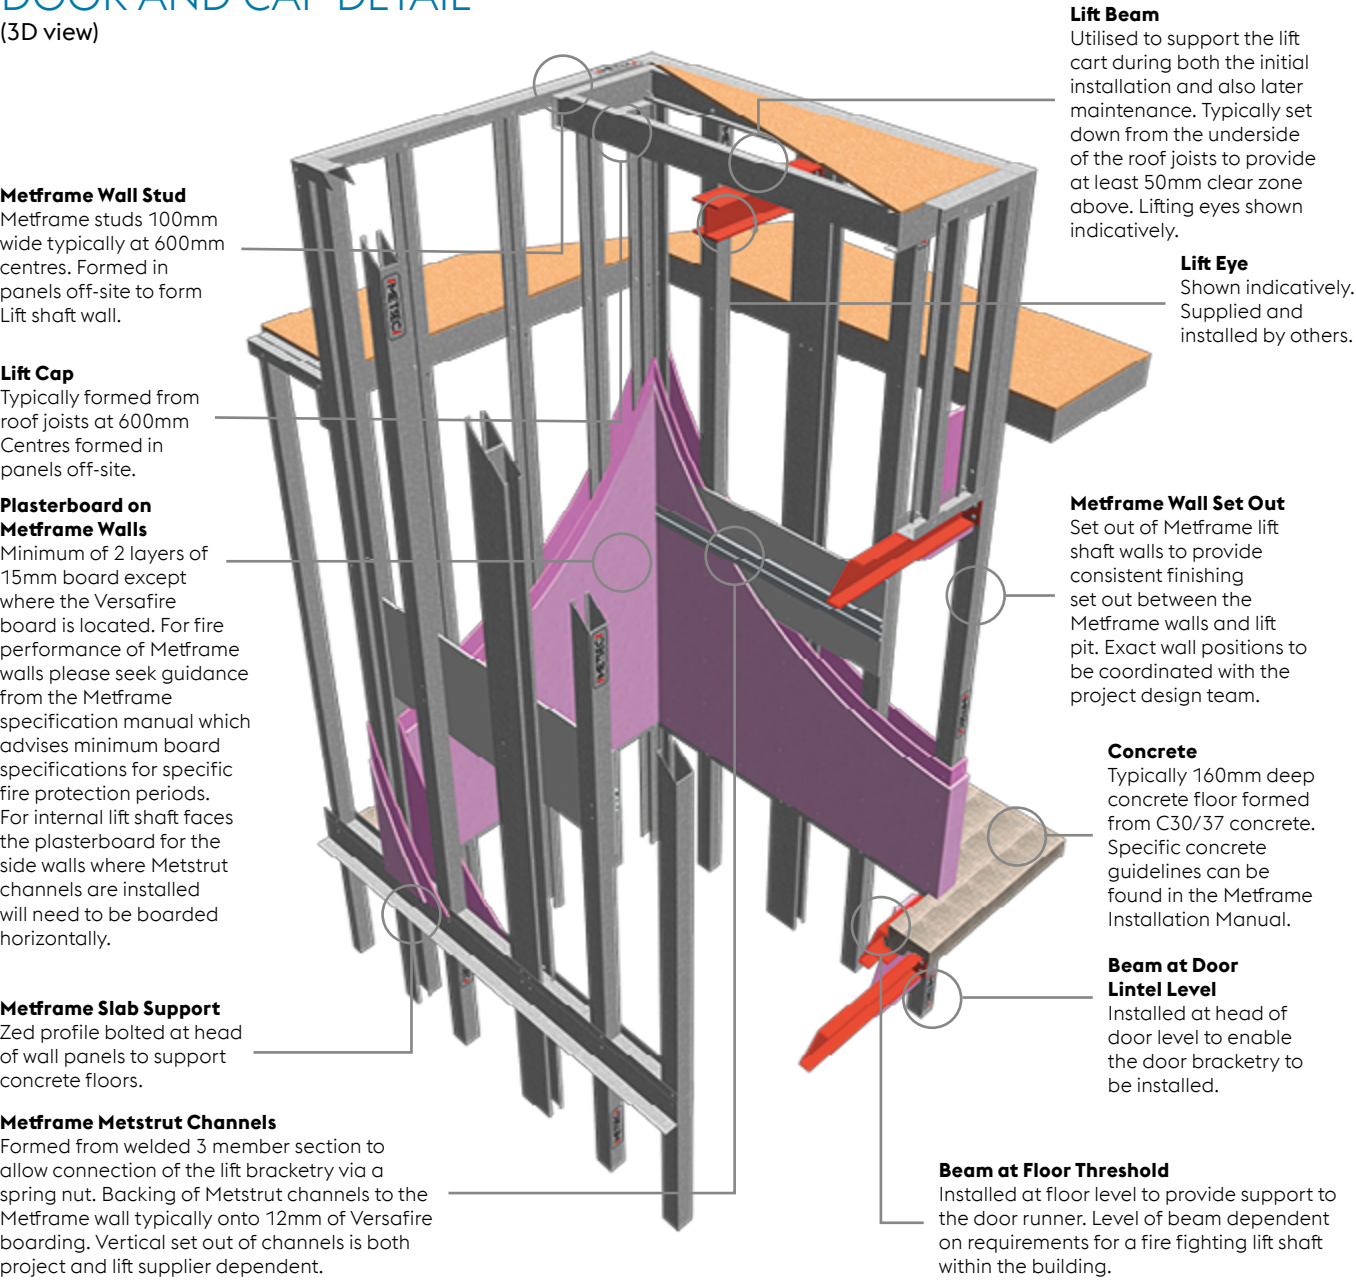




DETAIL MF017  
LIFT SHAFT WITH  
DOOR AND CAP DETAIL  
(Sectional details)

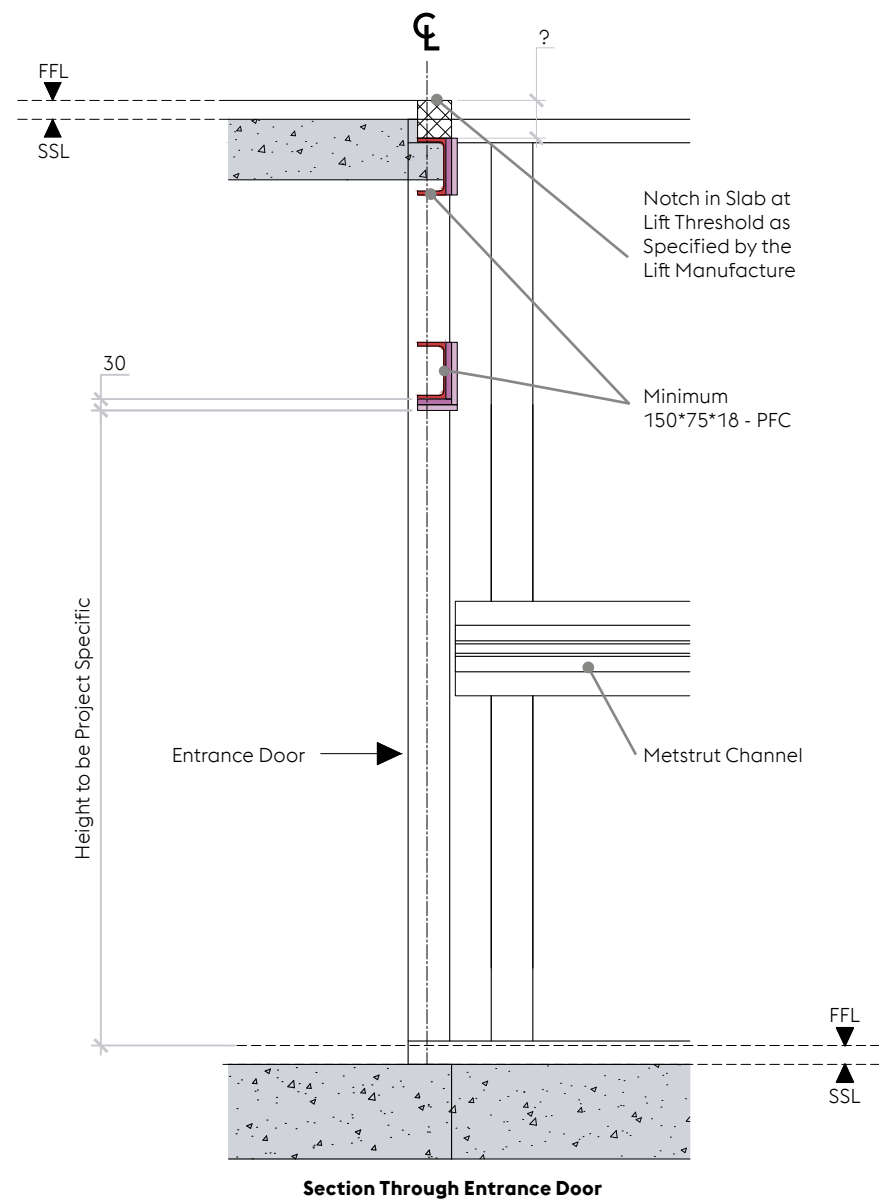




# METFRAME HOT ROLLED STEEL DESIGN

## DETAIL MF012 EXPOSED BEAM FIRE PROTECTED WITH 50mm COVER PLATES USED TO SUPPORT DECKING

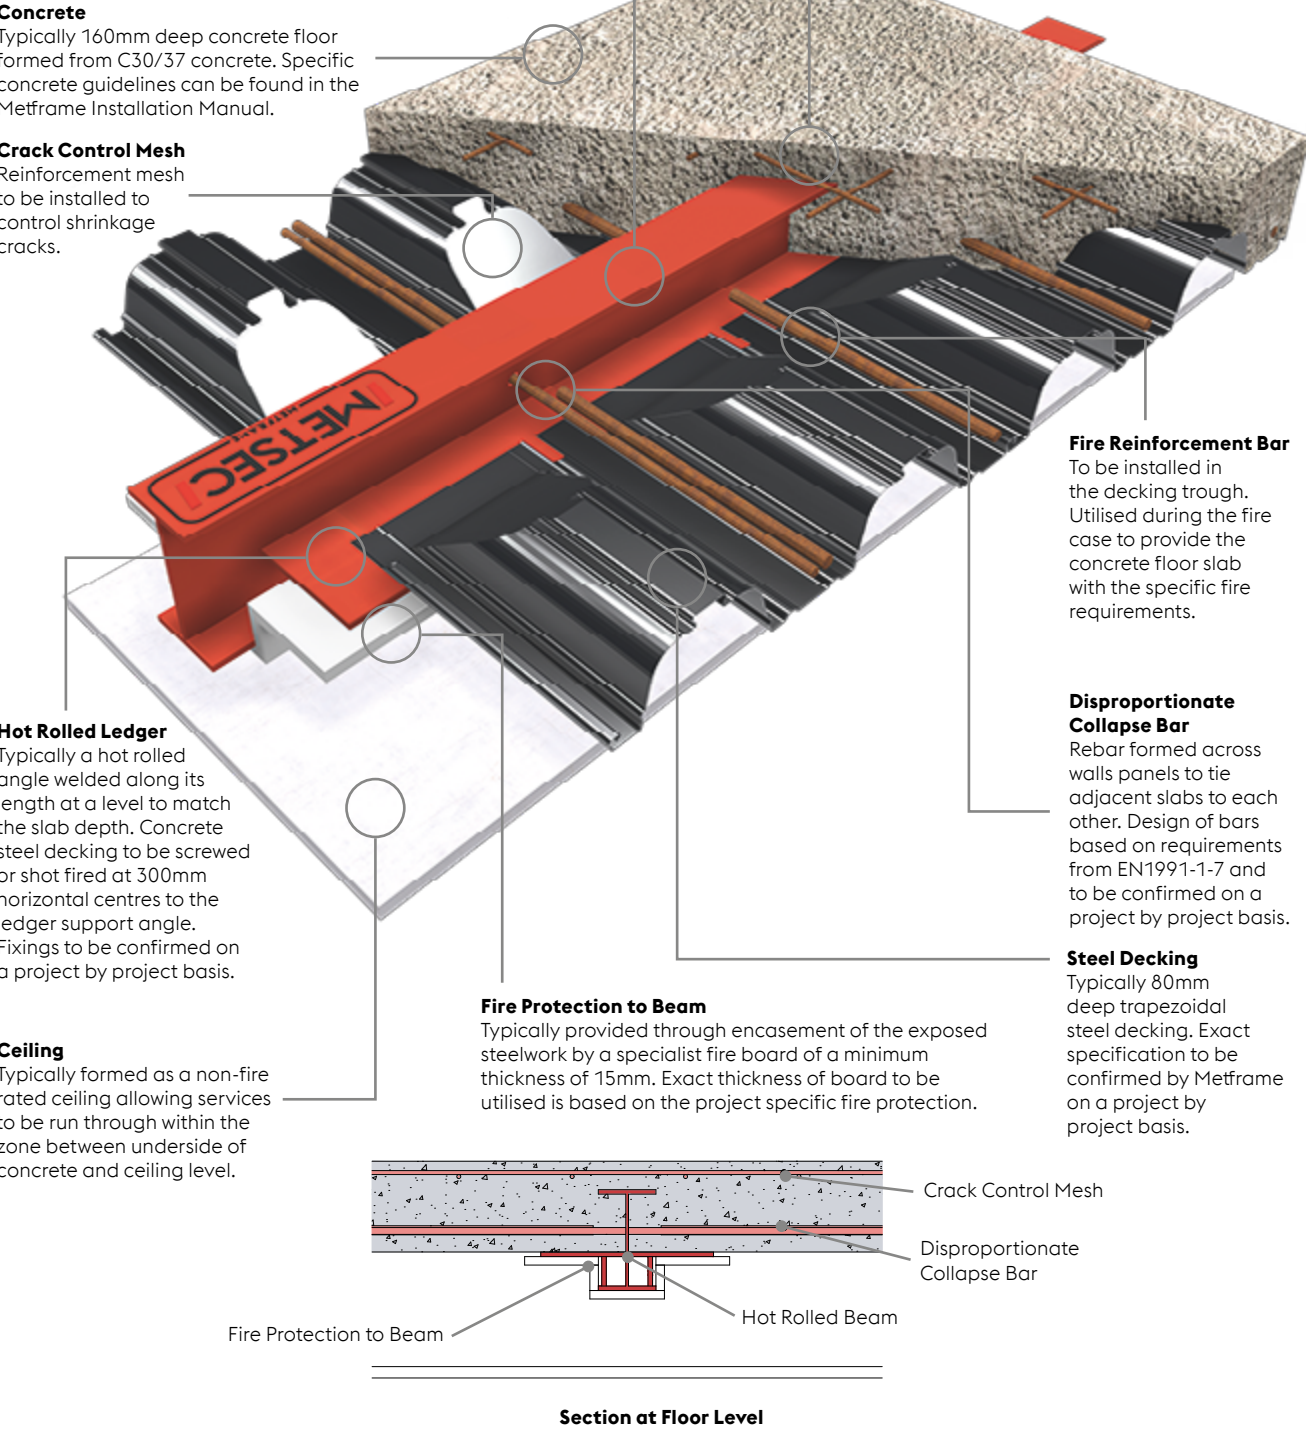


## DETAIL MF013 FIRE PROTECTION FOR AN EXPOSED BEAM WITH NO CONCRETE COVER PLATES USED TO SUPPORT DECKING

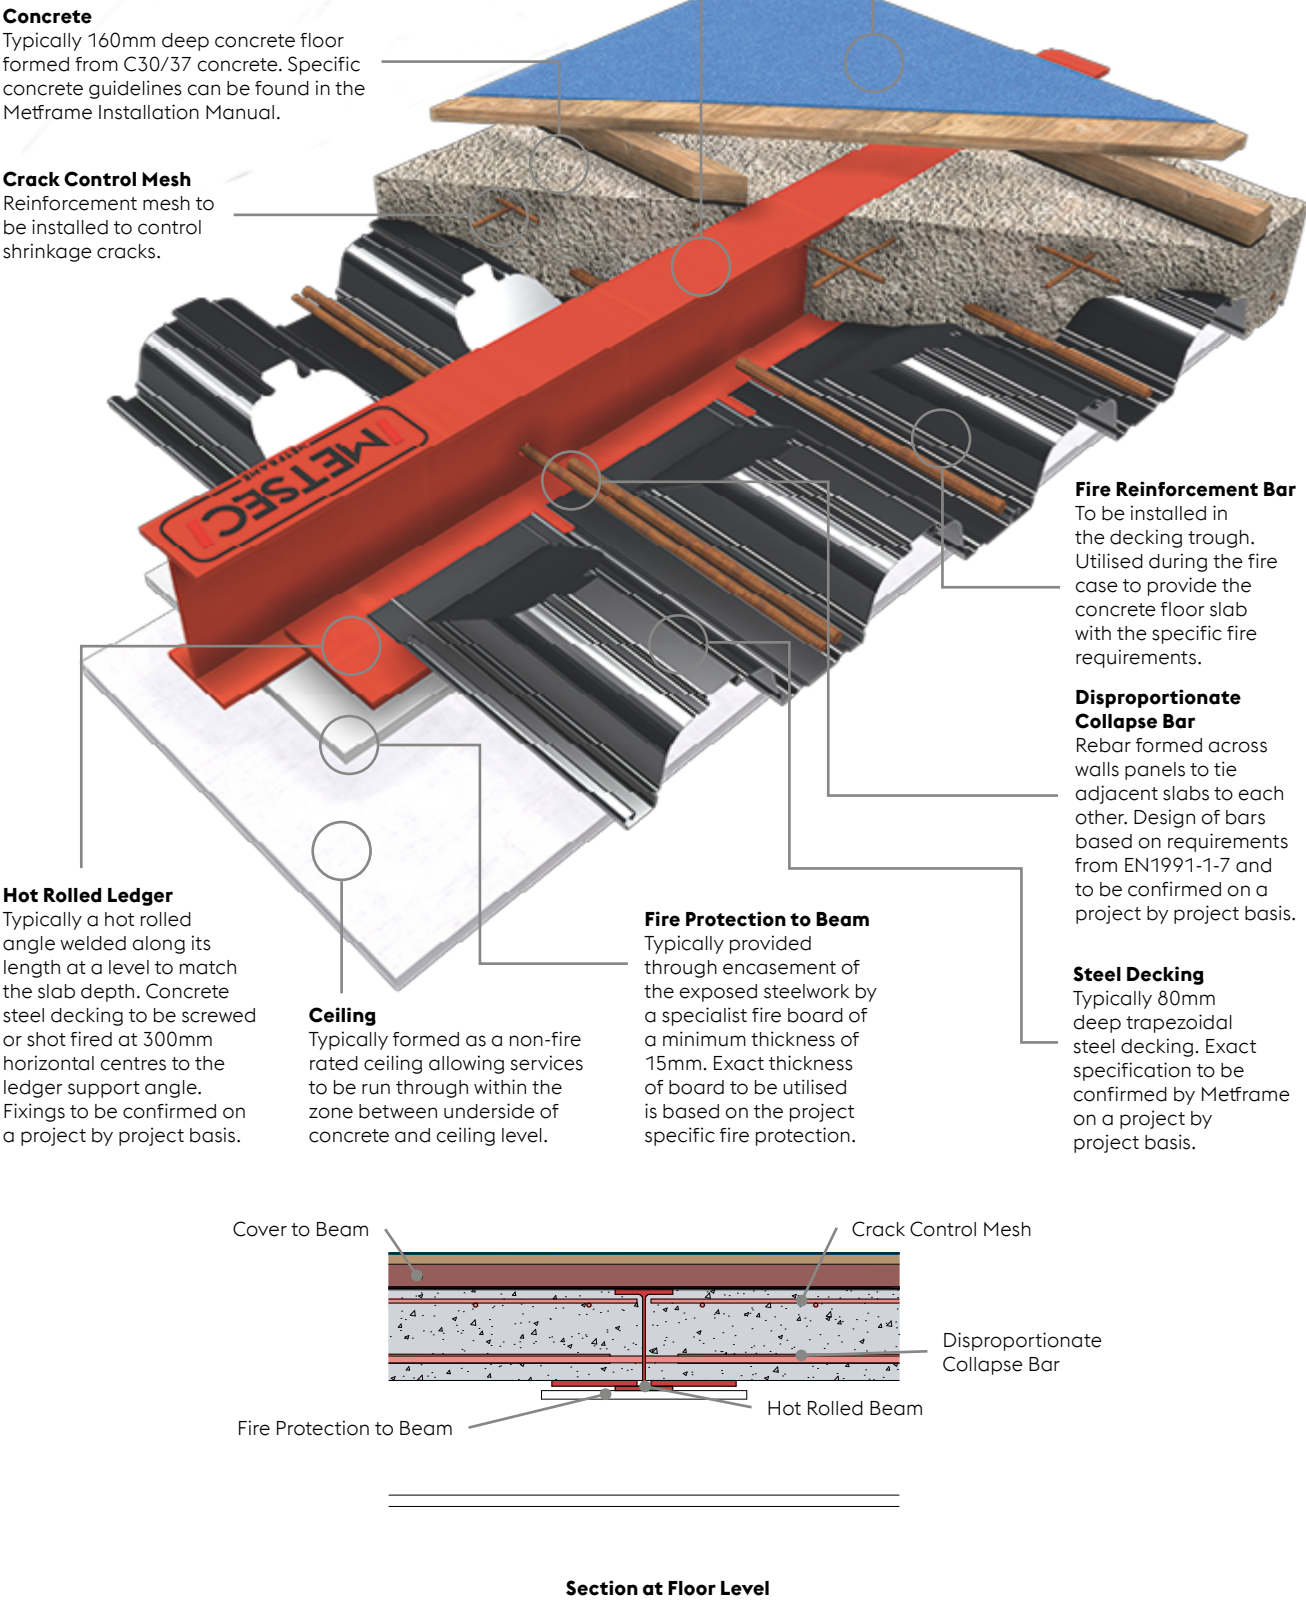




# METFRAME BALCONIES

## DETAIL MF022 EXTERNAL WALL WITH CANTILEVER BALCONY (Viewed externally)

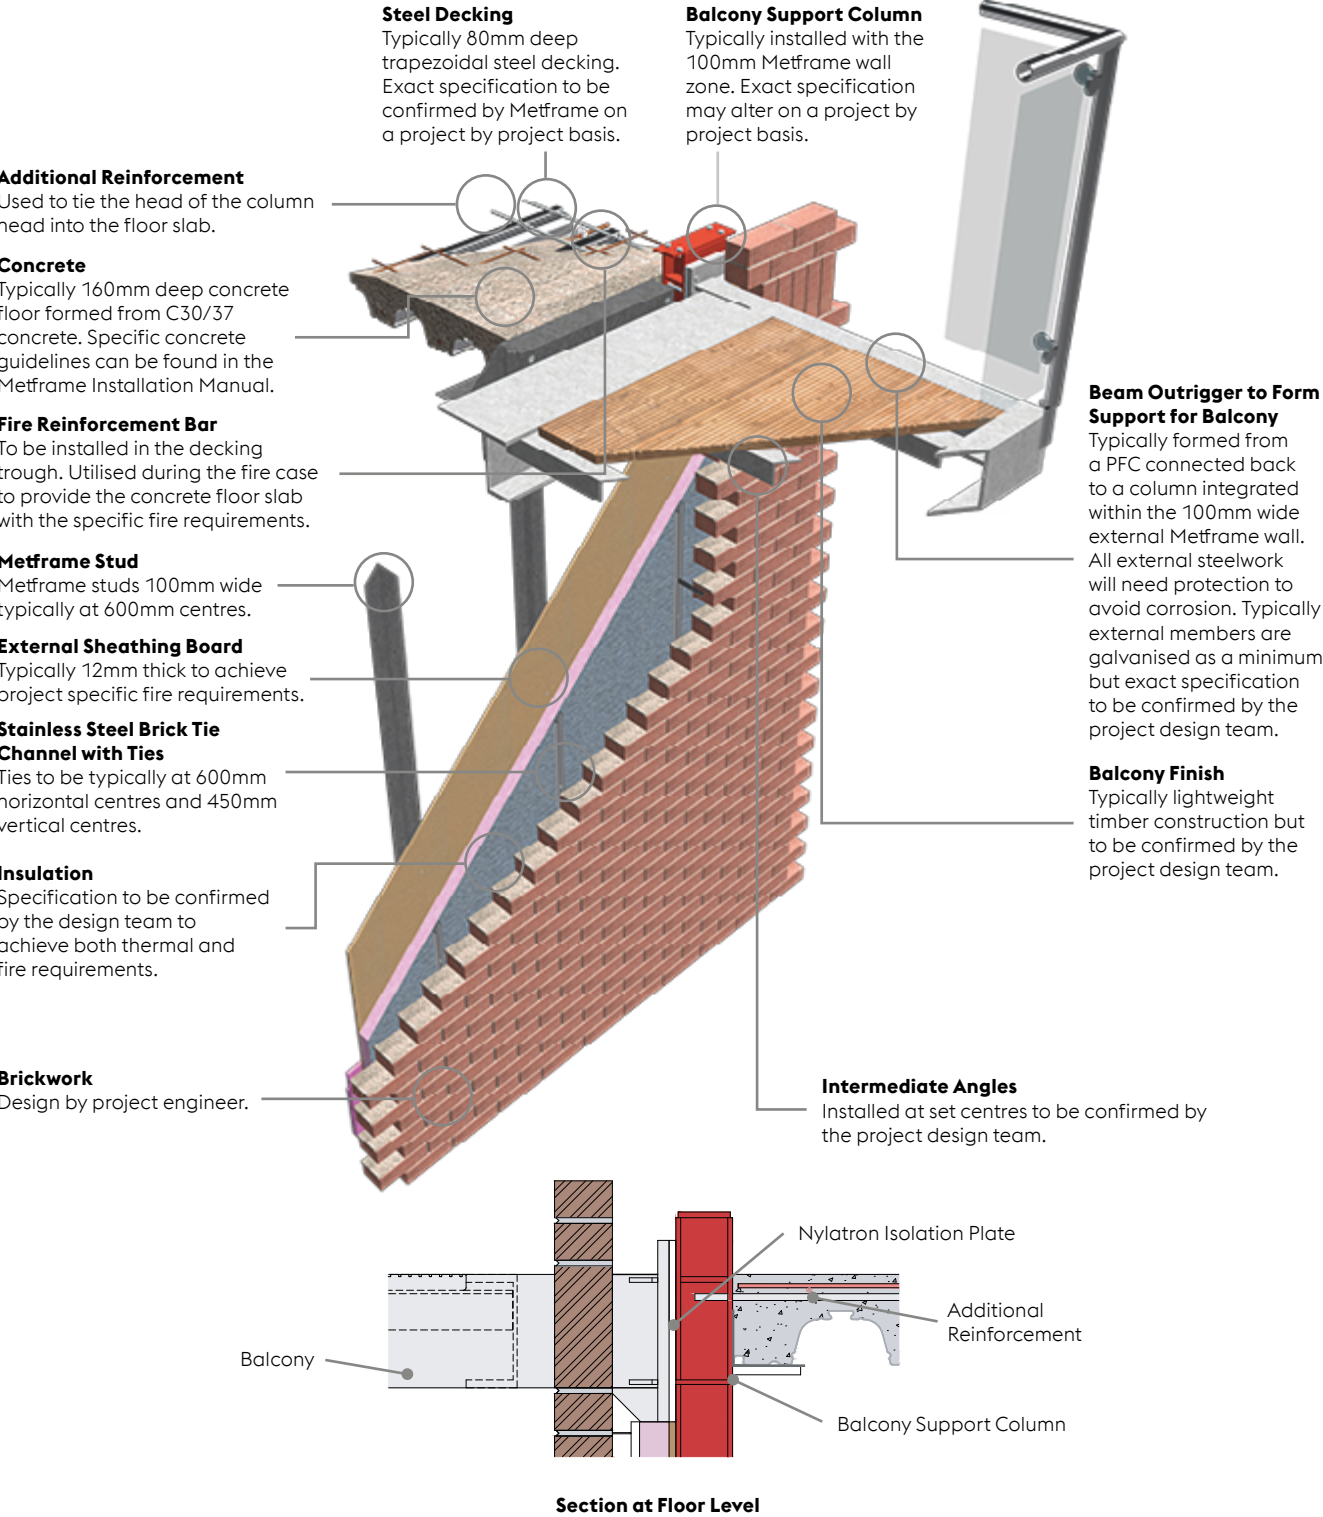

## DETAIL MF022 EXTERNAL WALL WITH CANTILEVER BALCONY (Viewed internally)

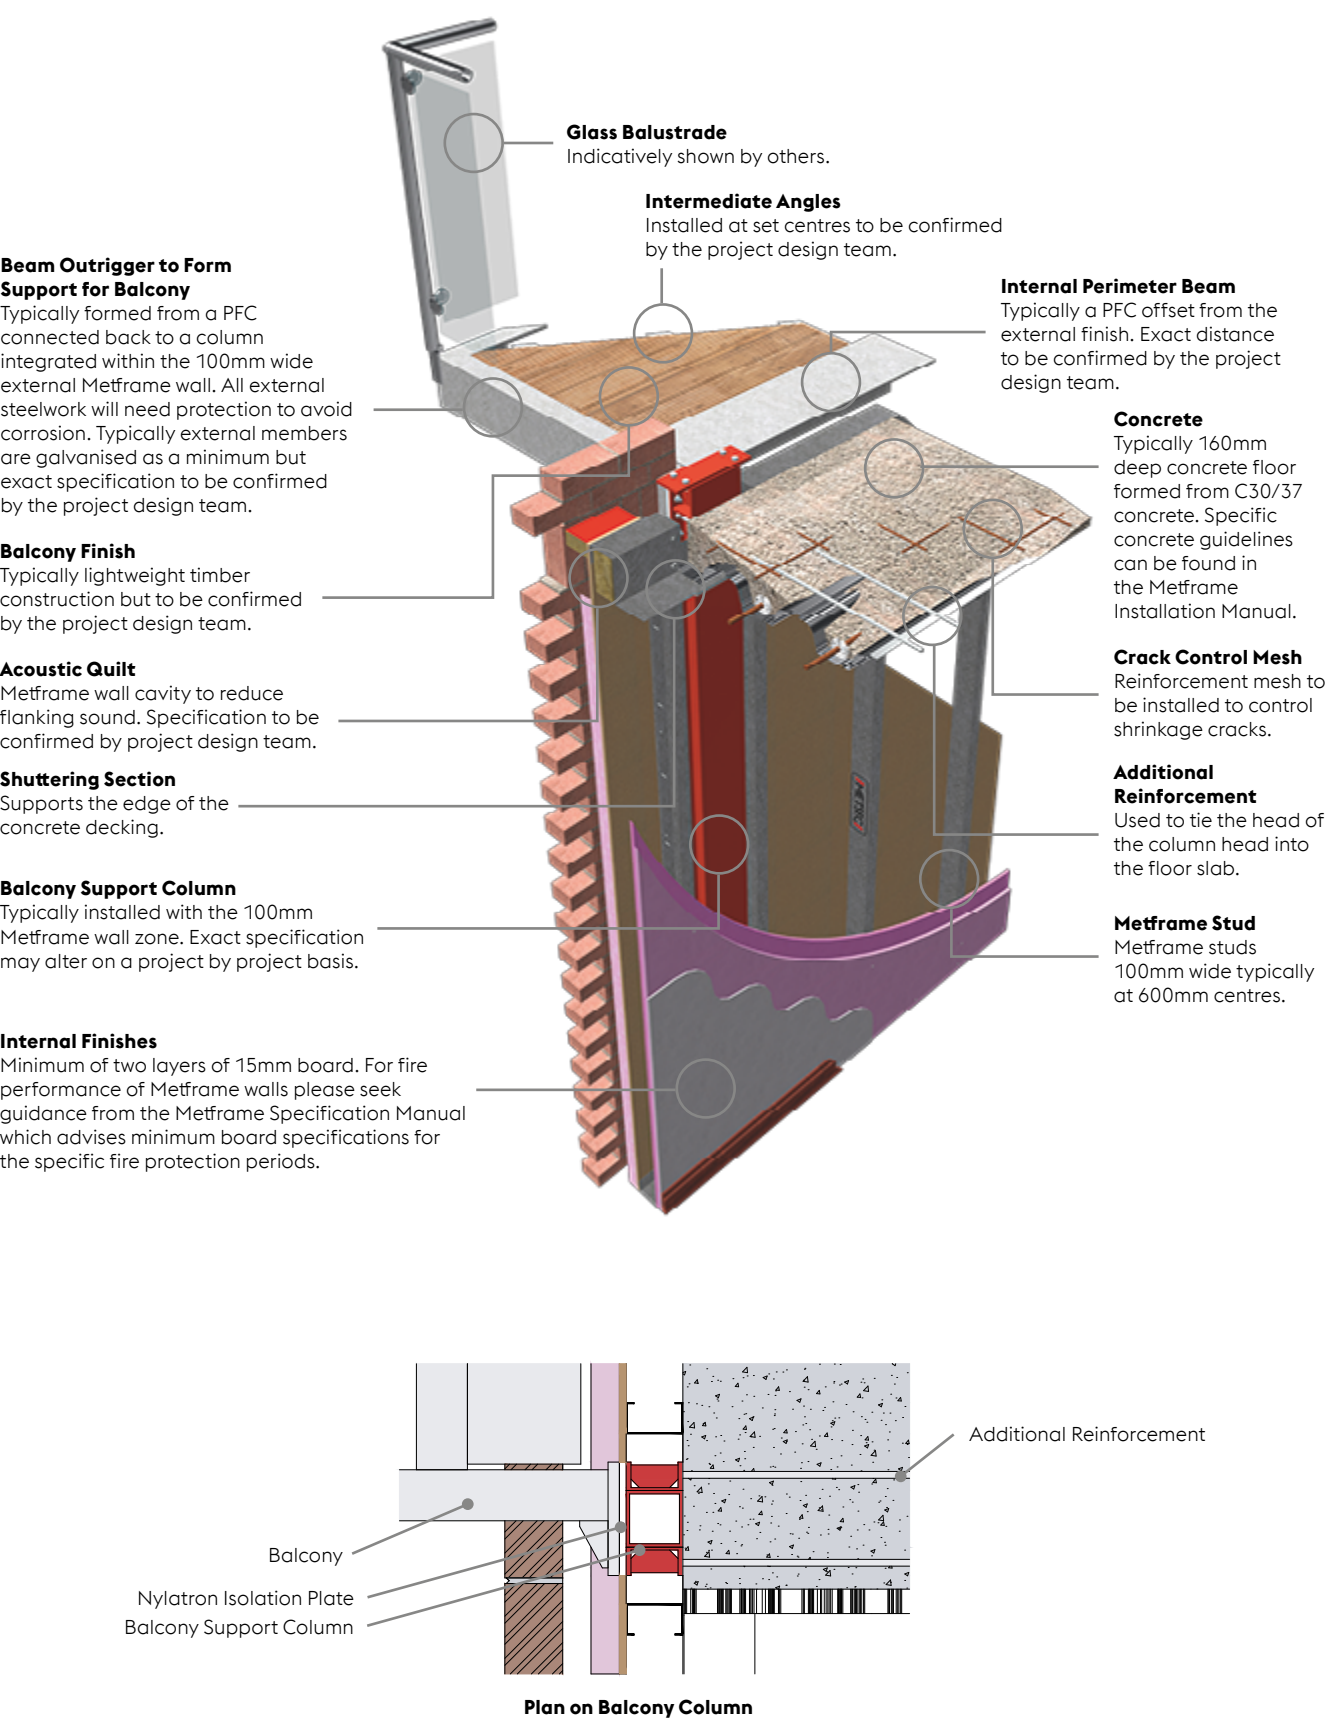



# METFRAME SUMMARY OF SER SUBMISSION

## Outline of Document

The aim of this document is to outline the information which voestalpine Metsec can provide for the SER submission.

## Metframe Design Philosophy

The basic principle of Metframe superstructures is that lightweight galvanised steel sections are used to form the structural elements of a building, based on proven engineering methods. The below summary utilises a generic project, there may be alternations to the below on a project by project basis.

Each storey height of the building frame is tied together and at each floor level with the floor construction which demonstrate adequate robustness as indicated in BS EN 1991 1-7 and UK National Annex to BS EN 1991 1-7.

The Metframe panel consists of vertical and horizontal steel channels; bolted together using countersunk bolts to form a frame. All sections are cold rolled from pre-galvanised steel strip to BS2989; grade Z39 which has a minimum yield of 450 N/mm<sup>2</sup>.

Externally, panels are fitted in the factory with carrier board and potentially insulation dependent on the external wall finish. On site the panels are fitted together using bolts, lined, and plumbed, before the plasterboard is added. Internal panels are fitted on site with two layers of board to both wall faces to suit the fire protection requirements. Where openings are required in the panels, these are accommodated as required with any additional lintels being incorporated.

Cold-formed steel joists are designed to support the roof construction and these loads are taken to the supporting load bearing wall sections. Horizontal forces into the roof are typically transferred into the shear wall through the use of the roof lining material acting as a diaphragm. Where this is not possible an additional roof plan girder is provided to transfer loads to cross walls.

Floors are constructed from single span composite concrete floor slabs supported by zed ledger angles. The slab sits on to the bottom horizontal leg of the zed member, and the top leg sits on to the top of the Metframe panel. All zed members are bolted to the face of the panels. On long span floors, temporary propping would be required during the construction phase. These concrete floor slabs are supported by the load bearing walls, again resisting the cumulative axial loads down to foundation level.

Overall stability of the structure below the roof level is dependent on the floor construction transferring horizontal loads to the shear walls. Stability to these shear walls is typically provided by the use of flat strap cross bracing to panels internal and externally. These straps are typically 1.2mm gauge 100mm wide strips fixed at the head and base of panels at stud node positions. Horizontal loads are transferred vertically down through the building through these braced wall systems to the supporting structure by others. The layout of these cross bracing straps are set out to limit any potential uplift effects at the lowest floor.

During the process leading to the Full SER submission, voestalpine Metsec are able to provide full calculations and design scheme drawings to the design team. These will include;

- » Design philosophy
- » Load takedown included line and point loads
- » Non-dimensioned structural layout showing beam sizes, column sizes, stud sizes, slab span and roof design
- » Structural calculations for beams, columns, studs, slabs and roofs
- » Wind loading calculations including wind loads on external walls and overall stability of the structure
- » Disproportionate collapse calculations
- » Standard connection pack stating design values but not calculations
- » Fire performance data and fire protection details to the frame
- » Checks carried out and certified by a competent checker included CV
- » Job specific connections details generally including podium structures/ground bearing slabs
- » Job specific Risk Assessments
- » List of beams & columns and proof of connections
- » Stair calculation to be checked by voestalpine Metsec
- » Stability check to be issued with line loads
- » Internal & External corrosion level to be identified on drawings
- » Imposed load to be identified on our structural scheme.

## SER SUBMISSION (CONTINUED)

The load takedown will indicate Metframe walls and beams with the associated dead and imposed loads for line loads and point loads. These will be unfactored and contain no imposed load reductions. The load take down will also indicate the shear at the base of the Metframe structure due to wind loading. No allowance will be made for any notional loads in the load take down.


The non-dimensioned structural layout will be similar to the adjacent example. This will be the design scheme based on the architectural drawings which were available at the time of design. The design scheme will indicate the wall, beam and column references which can be read in conjunction with the design calculations as well as clearly indicating the beam and column sizes, slab orientations and slab depths. This will not take into account any changes which have been made after the design period as a result of comments on the Metframe GAs. Connections will not be labelled unless they are designed differently from the standard connections. The location of bracing straps will not be indicated.

To complete the full submission the following additional information will also be provided

- » Full dimensioned GAs and sections
- » Decking plans
- » Marking plans
- » Bracing plan
- » Fabrication drawings including hot rolled and cold rolled panels

Stair fabrication drawings and calculations are outside of the voestalpine Metsec scope of works as these are supplied by a specialist stair manufacturer.

The full dimensioned GAs and sections are those which have been commented on and approved by members of the design team. These will include indications of all beams and any hot rolled columns. Cold rolled members will not be labelled.

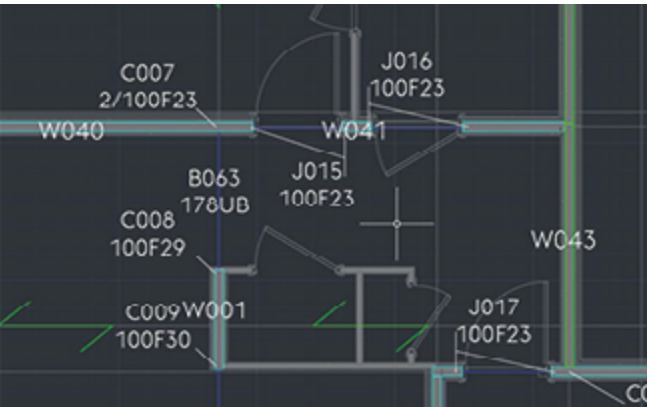


Example design scheme

The full structural calculations will include beams, columns, studs, slabs and roofs. The beam design will include checks for the moment capacity, shear capacity, and frequency as well as deflections as a result of both permanent and imposed loads. The column and stud design will have hidden sectional properties for the voestalpine Metsec studs which will not be available for review due to these being commercially sensitive values. The slab design will be based on software available from the decking manufacturer using properties built into their software. Roof design will include designs for permanent and imposed loads as well as uplift and snow loads.

The wind loading calculations will utilise basic wind loads as determined by voestalpine Metsec, unless basic wind loads are provided before the commencing of design. Those wind loads are determined through voestalpine Metsec in-house 'MetSPEC' design software. Design of bracing is calculated to include notional loading. The set out of the bracing will not be shown at this stage.




Disproportionate collapse calculations will state the requirements for this project and the design for this project, however it will not indicate the exact locations as this is shown in the voestalpine Metsec standard details and decking plans.

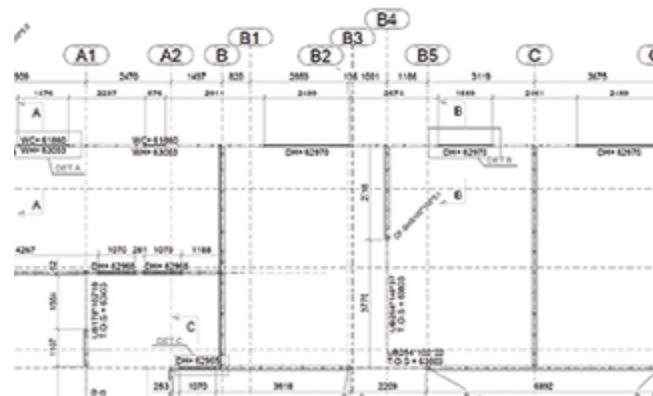

### Example fully dimensional GA

Decking plans will indicate span directions and decking gauges as well as any requirement for temporary propping. These plans will also indicate any reinforcement required for disproportionate collapse.

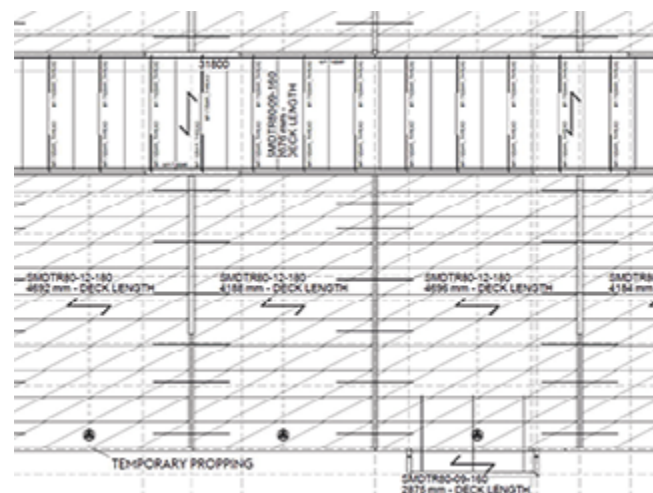

### Example decking plan

# NOTES



# NOTES



- » FRAMING
- » PURLINS
- » DRY LINING
- » CABLE MANAGEMENT
- » CUSTOM ROLL FORMING

#### **Framing**

**Tel: +44 (0) 121 601 6000**

**Fax: +44 (0) 121 601 6021**

**[metsec.metframe@voestalpine.com](mailto:metsec.metframe@voestalpine.com)**

© Copyright voestalpine Metsec plc 2023

In the interests of a policy of continuous research and development, voestalpine Metsec plc reserve the right to change the specifications in this publication without prior notice.

#### **voestalpine Metsec plc**

Broadwell Road, Oldbury, West Midlands, B69 4HF

Tel: +44 (0) 121 601 6000

Fax: +44 (0) 121 601 6021

email: [metsec.plc@voestalpine.com](mailto:metsec.plc@voestalpine.com)

**[www.metsec.com](http://www.metsec.com)**

**voestalpine**

ONE STEP AHEAD.